E300


FEATURES

- HIGH-FLOW PUMP
- STURDY STRUCTURE
- HEAVY DUTY APPLICATION
- IP55


The PIUSI E300 is an electric pump with open impeller suitable for all applications in which high-flows are required. Thus, it is the ideal equipment for topping up and transferring diesel from drums. It comes with an incorporated check valve in the suction port to prevent the siphon effect while ensuring automatic re-priming.

PERFORMANCE

UP TO 500 L/MIN	AC CONTINUOUS DUTY
FLOW RATE	POWER
1,7 BAR	
MAX. PRESSURE	

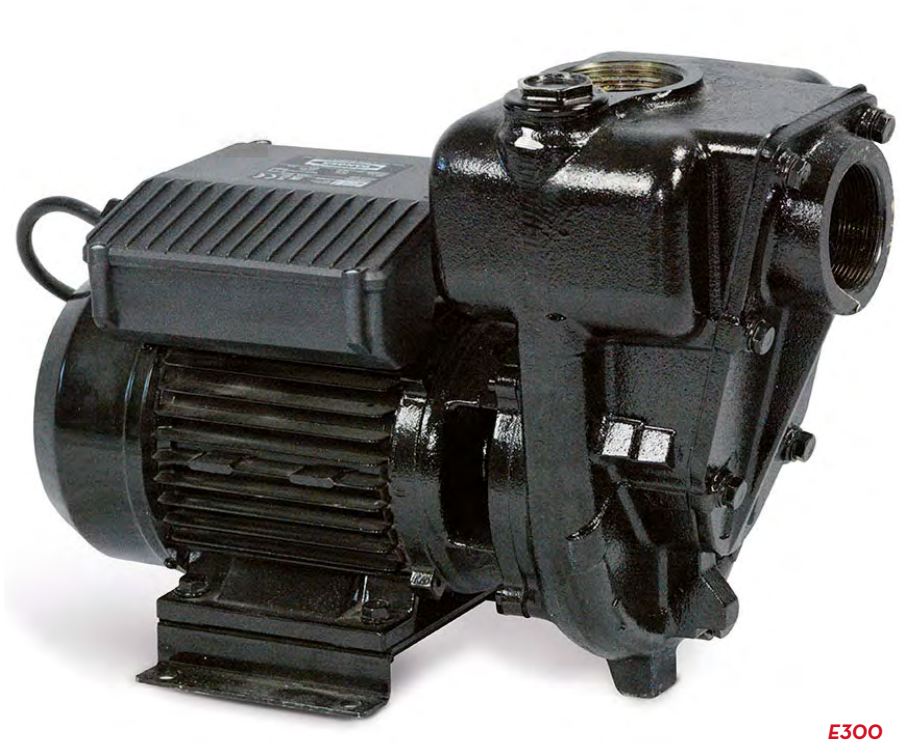

E300

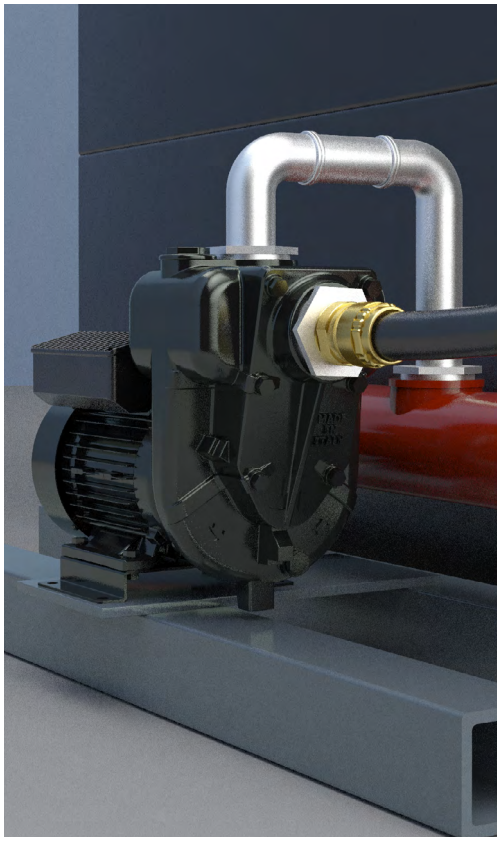


PACKAGING

CODE	WEIGHT		PACKAGING		
	KG	LBS	MM	INCH	PCS/BOX
F00321000	27	59	220X420X330	8,7X16,5X13	1

ANY BIODIESEL | AIR | ANTIFREEZE | AdBlue® | BIODIESEL | **D** DIESEL | FOOD | GASOLINE | GREASE | KEROSENE | OIL | WATER | WINDSCREEN

CHART

E300

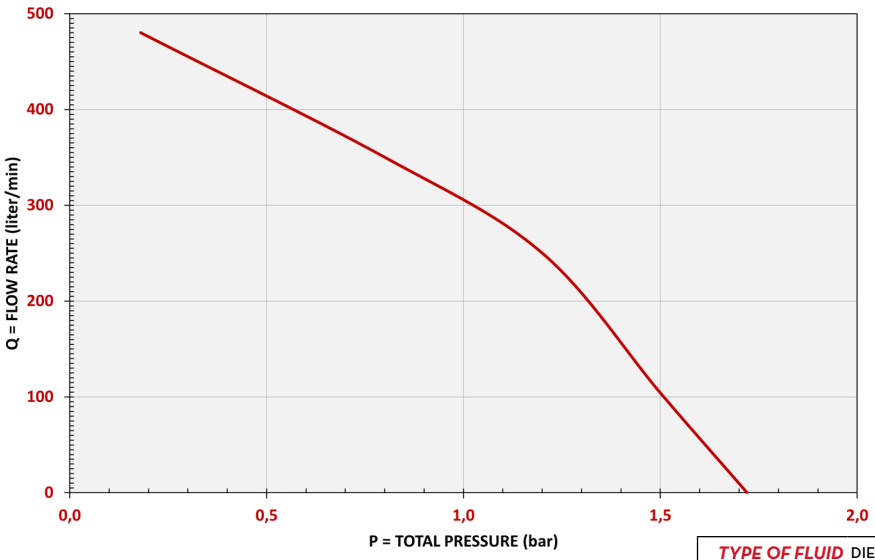


TYPE OF FLUID	DIESEL
TEMPERATURE	10°C

IN THE BOX

- E300 PUMP
- INSTRUCTION MANUAL

DETAILS



OPEN IMPELLER




2" IN/OUT CONNECTIONS



STEADY SUPPORT

DIMENSIONS

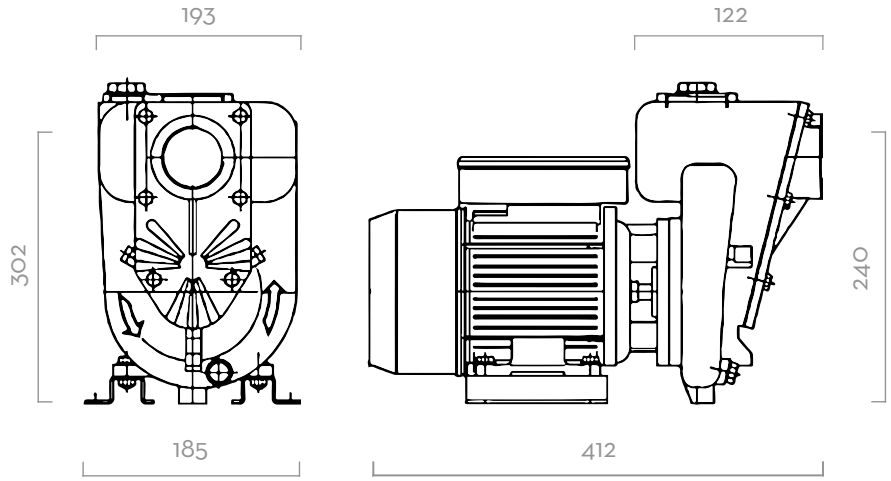

Dimensions expressed in millimeters

MATERIALS

- BODY: CAST IRON
- OPEN IMPELLER: CAST IRON
- SEAL: VITON
- SHAFT: STEEL

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		VOLTAGE			RPM	INLET OUTLET
			L/MIN	GPM	AC VOLT/HZ	POWER WATT	AMP. MAX.		BSP
F00321000	E 300	D	500	130	230/50	1500	9,5 A	2580	2"