EX140 DRUM

FEATURES

- THERMAL PROTECTION
- SUCTION UNIT WITH INTEGRATED FILTER
- BUILT-IN BYPASS VALVE
- UL VERSION AVAILABLE

The entire new EX line is characterized by a high flow rate and has been designed to be particularly suitable for Heavy Duty, i.e.for those demanding fleets that need to dispense fuels such as Gasoline, diesel or kerosene quickly.
The PIUSI EX140 DRUM is ATEX certified and complies with the directives on the use of materials in potentially explosive atmospheres.

Atex II 2 G

On request CLASSIFIED C UL US

IEC Ex

PERFORMANCE

UP TO 140 L/MIN	AC VOLTAGE
FLOW RATE	POWER



EX140 DRUM /A140/K150/5MT



EX140 DRUM /A140/5MT



OUR PUMPS COMPLIES WITH THE FOLLOWING MARKING ATEX/IECEx

II	2	G	Ex	d	IIA	T4	Gb
GROUP	CATEGORY	TYPE OF EXPLOSIVE ATMOSPHERE	PERMANENT PREFIX	PROTECTION METHOD	GAS GLASS	TEMPERATURE CLASS	EQUIPMENT PROTECTION LEVEL


PACKAGING

CODE	WEIGHT		PACKAGING		
	KG	LBS	MM	INCH	PCS/BOX
F00396010	25	55	240X400X350	10X16X15	1
F00396030	25	55	240X400X350	10X16X15	1
F00396020	25	55	240X400X350	10X16X15	1
F00396310	32	70	400X600X430	16X24X17	1

ANY BIODIESEL AIR ANTIFREEZE AdBlue® BIODIESEL DIESEL FOOD GASOLINE GREASE KEROSENE OIL WATER WINDSCREEN

CHART

EX140 DRUM

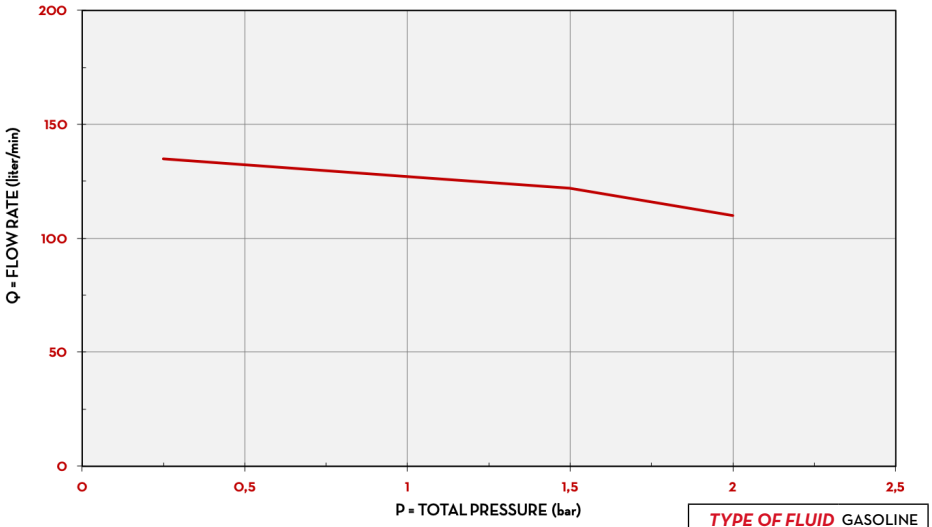


TYPE OF FLUID	GASOLINE
TEMPERATURE	20°C

IN THE BOX

- EX140 PUMP
- NOZZLE HOLDER
- 2" CONNECTOR
- 90° FLANGED ELBOW
- K150 ATEX METER (ON SELECTED VERSION)
- A140 ATEX AUTOMATIC NOZZLE (ON SELECTED VERSION)
- DELIVERY HOSE (ON SELECTED VERSION)
- INSTRUCTION MANUAL

DETAILS



MESH STRAINER


2" TANK CONNECTOR


90° FLANGED ELBOW


BENDING PROTECTION

DIMENSIONS

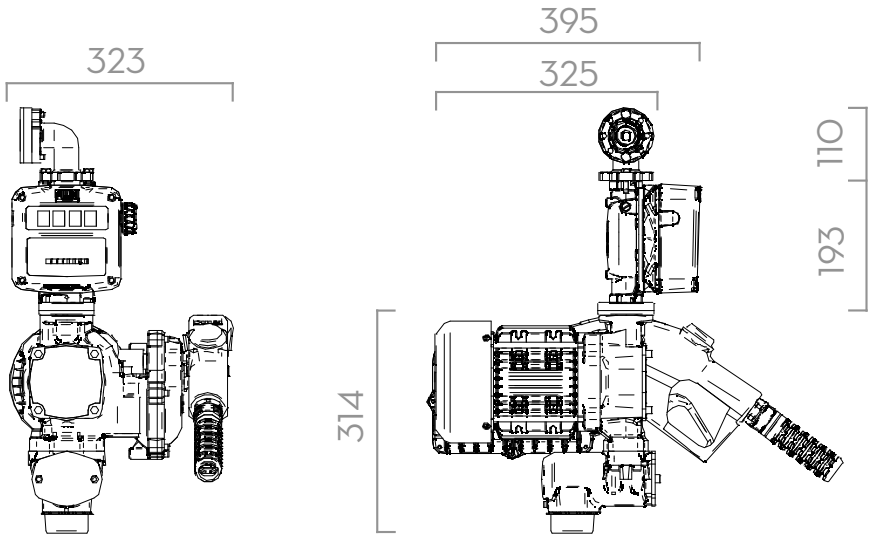

Dimensions expressed in millimeters

COMPONENTS

- PUMP:
  EX140
- METER:
  K150 ATEX
- NOZZLE:
  A140 ATEX

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		VOLTAGE			INLET	OUTLET	METER	DELIVERY HOSE	BENDING PRO-TECTION	ULTRA HI-FLOW AUTO NOZZLE
			L/MIN	GPM	AC V./HZ	POWER WATT	AMP. MAX.						
F00396010	(EX) EX140 DRUM 230V/50HZ (PUMP ONLY)	D G K	140	37	230/50	1150	5	2" BSP	1" BSP	-	-	-	-
F00396030	(EX) EX140 DRUM 230V/60HZ (PUMP ONLY)	D G K	140	37	230/60	920	4	2" BSP	1" BSP	-	-	-	-
F00396020	(EX) EX140 DRUM 250V/50HZ (PUMP ONLY)	D G K	140	37	250/50	1125	4,5	2" BSP	1" BSP	-	-	-	-
F00396310	(EX) EX140 DRUM 230/50 /A140/K150/5MT	D G K	140	37	230/50	1150	5	2" BSP	1" BSP	K150	D.25 5MT	YES	A140

(*) AVAILABLE WITH DIFFERENT VOLTAGES AND 60 HZ FREQUENCIES. COMPATIBLE FLUIDS: DIESEL, KEROSENE, PETROL, PETROL/ALCOHOL MIXTURE UP TO 15%, AVGAS 100/100LL (PUMP AND FLOW METER ONLY), JET A/A1 (PUMP AND FLOW METER ONLY), ASPEN 2/4