K150

FEATURES

- HEAVY DUTY CONDITIONS
- HIGH FLOW RATE
- BURSTING PRESSURE 28 BAR
- EASY READING
- 4 FLOW DIRECTIONS
- O-RING SEAT ON THE INLET FLANGE, TO FACILITATE INSTALLATION ON PUMPS

K150 is expressly engineered to meet the market requirements of a meter suitable for flow rates superior than 120 l/min and that can be used both for fluids such as diesel and biodiesel, as well as in potentially explosives atmosphere; with gasoline for example. K150 is easy to calibrate and ready to use; its aluminium cover and sturdy body make this meter suitable for a wide arrange of application while guaranteeing the same precision and quality that have always featured PIUSI equipment. The mechanical display allows to read quickly the quantity dispensed. It can be installed everywhere thanks to the (optional) 1,5" flange kit.

PERFORMANCE

UP TO 25-150 L/MIN — FLOW RATE	3,5 BAR MAX — OPERATING PRESSURE
± 1% — ACCURACY	0,3% — REPEATABILITY





K150



K150 BIO




PACKAGING

CODE	WEIGHT		PACKAGING			BOXES/EUROPALLET	
	KG	LBS	MM	INCH	PCS/BOX	✈	🚢
FOO554AOA	2,38	5,25	185X185X170	7,28X7,28X6,69	1	192	240
FOO554BOA	2,38	5,25	185X185X170	7,28X7,28X6,69	1	192	240
FOO554COA	2,38	5,25	185X185X170	7,28X7,28X6,69	1	192	240
FOO554DOA	2,38	5,25	185X185X170	7,28X7,28X6,69	1	192	240
FOO554B1A	2,38	5,25	185X185X170	7,28X7,28X6,69	1	192	240

ANY BIODIESEL | AIR | ANTIFREEZE | AdBlue® | HVO/XTL | DIESEL | FOOD | GASOLINE | GREASE | KEROSENE | OIL | WATER | WINDSCREEN

CHART

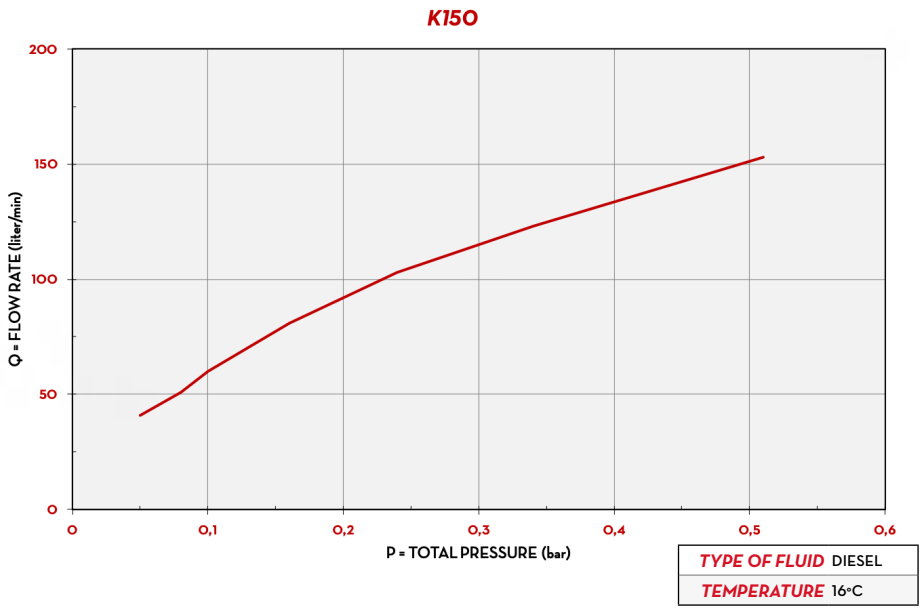


TYPE OF FLUID	DIESEL
TEMPERATURE	16°C

IN THE BOX

- K150 METER
- INSTRUCTION MANUAL

DETAILS



NUTATING DISK


4 FLOW DIRECTIONS


METALLIC COVER


O-RING SEAT ON INLET FLANGE

DIMENSIONS

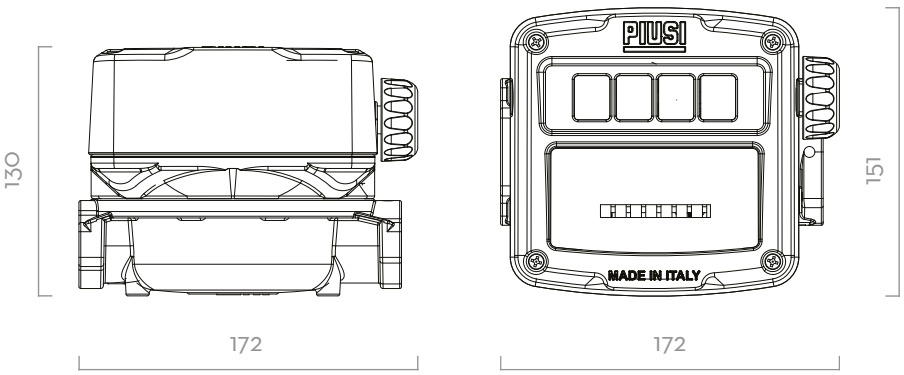

Dimensions expressed in millimeters

MATERIALS

- BODY AND COVER: ALUMINIUM
- NUTATING DISK CHAMBER: TECHNOPOLYMER

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		FLOW DIRECTIONS	PRESSURE		INLET/OUTLET
			L/MIN	GPM		BAR	PSI	BSP
FO0554A0A	CONTALITRI K150 - 1" BSP VER.A BLACK	D	25-150	6,6-40	←	3,5	50	1" BSP
FO0554B0A	CONTALITRI K150 - 1" BSP VER.B BLACK	D	25-150	6,6-40	↑	3,5	50	1" BSP
FO0554C0A	CONTALITRI K150 - 1" BSP VER.C BLACK	D	25-150	6,6-40	↓	3,5	50	1" BSP
FO0554D0A	CONTALITRI K150 - 1" BSP VER.D BLACK	D	25-150	6,6-40	→	3,5	50	1" BSP
FO0554B1A	CONTALITRI K150 - 1"BSP VER.A B100 BLACK	BIO D	25-150	6,6-40	←	3,5	50	1" BSP

THE PIUSI K150 IS A MECHANICAL METER EXPRESSLY ENGINEERED FOR HEAVY DUTY AND HIGH FLOW RATE APPLICATIONS. IT IS EASY TO CALIBRATE AND READY-TO-USE; ITS ALUMINIUM COVER AND STURDY BODY MAKE THIS METER SUITABLE FOR A WIDE ARRANGE OF APPLICATIONS WHILE GUARANTEEING THE SAME PRECISION AND QUALITY THAT HAVE ALWAYS BEEN A FEATURE OF PIUSI EQUIPMENT.