OCIO 2.0

FEATURES

- LOW/HIGH LEVEL ALARMS
- FLUID QUANTITY INDICATION
- FLUID HEIGHT INDICATION
- BUILT-IN DISPLAY
- COMPATIBLE WITH SSM 2.0, MCO 2.0 AND B.SMART

With its brand-new design, OCIO 2.0 by PIUSI is the upgraded version of the tank level indicator compatible with SSM 2.0, MCO 2.0 and B.Smart systems.
It requires a LAN/Wi-Fi connection to communicate with the software.
It maintains all the performances of the standard OCIO.
Thanks to its interchangeable probe, OCIO 2.0 is compatible with several fluids.

PERFORMANCE

UP TO **4MT** HEIGHT — TANK	**± 1%** FULL SCALE — ACCURACY
UP TO **50 MT** LENGTH — PROBE TUBE	UP TO **30 CST** — VISCOSITY





OCIO 2.0



10 METERS HOSE



BRASS PROBE

PACKAGING

CODE	WEIGHT		PACKAGING		
	KG	LBS	MM	INCH	PCS/BOX
F00755260	2,2	4,8	300X410X100	11,8X16,1X3,9	1
F00755220	2,2	4,8	300X410X100	11,8X16,1X3,9	1
F00755210	2,2	4,8	300X410X100	11,8X16,1X3,9	1

ANY BIODIESEL · AIR · ANTIFREEZE · AdBlue® · BIODIESEL · DIESEL · FOOD · GASOLINE · GREASE · KEROSENE · OIL · WATER · WINDSCREEN


CONNECTION



IN THE BOX

- OCIO 2.0
- PROBE
- 10 MT TUBE
- INSTRUCTION MANUAL

DETAILS


BRASS PROBE

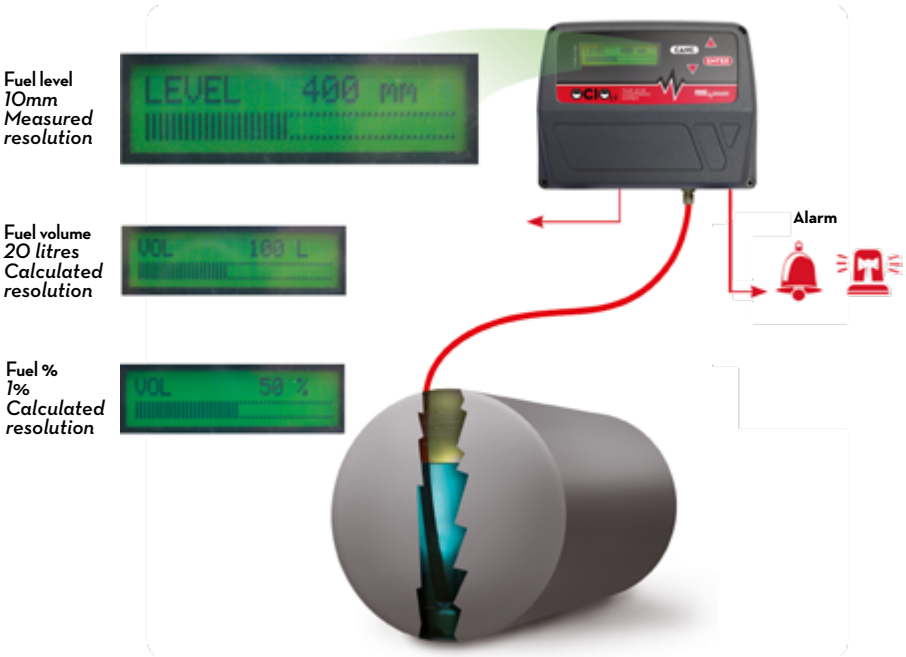

2 ALARMS


INTEGRATED LAN ADAPTER

SSM 2.0 SELF SERVICE MANAGEMENT

SSM 2.0 SOFTWARE

FUNCTIONING



MATERIALS

- PROBE: BRASS
- TUBE: TECHNOPOLYMER

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	VISCOSITY	VOLTAGE	
			cSt	AC V./HZ	POWER WATT
F00755260	LEVEL INDICATOR OCIO LAN 2.0	A B D O W	UP TO 30	230-50/60	20
F00755220	LEVEL INDICATOR OCIO RS485 2.0	A B D O W	UP TO 30	230-50/60	20
F00755210	LEVEL INDICATOR OCIO WIFI 2.0	A B D O W	UP TO 30	230-50/60	20