PIUSI

MADE IN ITALY
DISTRIBUTED BY
PIUSI USA, INC.

FUEL SOLUTIONS

2026 CATALOG



"At PIUSI, we believe ***innovation should never stand still.*** *That's why we're on the move—delivering technology that moves the work forward."*

70+ YEARS AS THE GLOBAL LEADER IN FLUID HANDLING



Precision, Performance, Reliability.

For over 70 years, PIUSI has delivered innovative fluid handling solutions worldwide. Trusted in 135 countries and with 45 years of proven excellence in the U.S., PIUSI brings unmatched quality, durability, and control to every customer.

Founded in Italy in 1953, PIUSI has been a major player in the world's leading markets, designing and manufacturing a full range of premium products for transferring, measuring, and managing fuels and fluids. From pumps and flow meters to nozzles, hose reels, dispensers, gauges, and software, PIUSI delivers complete solutions trusted by professionals worldwide.

PIUSI products are built for real-world work—whether it's fueling trucks and fleets, supporting agriculture and construction, servicing workshops and garages, or handling fluids in industrial and marine environments. Everything is engineered to be intuitive, reliable, and easy to install in a wide range of applications.

All PIUSI products reflect the company's long-standing commitment to innovation, quality, and performance. Founded in Suzzara, Italy—about 93 miles from Milan and Venice—PIUSI serves customers across the globe thanks to a large distributor network and its PIUSI USA Headquarters in Fort Lauderdale, Florida.

Fuel in Motion™

PRODUCT RANGE

SOLUTION	CATEGORY	PRODUCTS	PAGE
PUMPS AND KITS	AC PUMPS	PANTHER EX56, PANTHER EX72, EX100, EX140	12-19
	DC PUMPS	EXTREME 16, EXTREME 20, EX50, EX75	20-27
	DIESEL ONLY PUMPS	BIPUMP, E300, E120, PANTHER 56	27-29
	AVIATION PUMPS & METER	PANTHER EX56, EX75, EX140, K150	30-31
	DC PUMP SYSTEMS	PITSTOP, PIUSIBOX BATTERY PACK, CARRY3000	32-33
	HAND PUMPS	HANDMAX, ROTARY HAND PUMP	34-35
NOZZLES	AUTOMATIC	A60-UL, A120-UL, A-140-UL, A60 AUTO, A120 AUTO	36
	MANUAL	SELF2000	37
METERS	MECHANICAL FLOW	K90, K150, K700M	38-39
	DIGITAL FLOW	K24-UL, K24-A, K24 PULSER, K24 CONDUIT PULSER	40
		K600/3, K600 B/3, K600/4	41
		K700, K900, REMOTE DISPLAY	42
FILTRATION	FILTERS	REPLACEMENT	43
	CAPTORS	WATER, CLEAR	43
FUEL MANAGEMENT SYSTEMS	B.SMART	MC BOX, CUBE 70, SELF SERVICE	44-45
	ADD-ONS	FUEL ECONOMY, MAPLY, TANK WATCHDOG	46-47
		MASTERSITE	48

SOLUTION	CATEGORY	PRODUCTS	PAGE
TANK MONITORING	LEVEL INDICATORS	OCIO	49
		OCIO LINK	49
CABINET DISPENSERS	REMOTE CABINET	CUBE 56	50
	SELF SERVICE	SELF SERVICE K44	50
ACCESSORIES	FUEL SPARE PARTS	FITTINGS, CONNECTORS, ADAPTERS, MOUNTS, ETC.	51



Continuous Duty Cycle

Engineered for high performance, PIUSI's continuous duty fuel pumps are built to work longer, reduce interruptions, and keep your operation running smoothly.

- Nonstop Performance
- Less Downtime
- Increased Productivity
- Uninterrupted Fuel Flow
- Lower Maintenance Costs

Fueling Uninterrupted

WHEN PRODUCTIVITY MATTERS, PIUSI KEEPS FUEL MOVING.

CHOOSE YOUR FUEL TRANSFER KIT

ALL KITS INCLUDE A **PUMP** AND **HOSE**.

BASIC KIT

PUMP + HOSE + **MANUAL NOZZLE**



BASIC+ KIT

PUMP + HOSE + **AUTOMATIC NOZZLE**



PRO MANUAL KIT

PUMP + **METER** + HOSE
+ **MANUAL NOZZLE**



PRO KIT

PUMP + **METER** + HOSE
+ **AUTOMATIC NOZZLE**



AC FUEL PUMPS

PANTHER EX56

UP TO 16 GPM

c UL us LISTED MOTOR

DUTY CYCLE: CONTINUOUS

DRY SUCTION HEIGHT – 10 FT.
WET SUCTION HEIGHT – 18 FT.

D G K FLUID TYPES

120V/60HZ



PART NUMBER	DETAILS	FLOW RATE	VOLT/HZ	AMP MAX	HOSE	INLET NPT	OUTLET NPT	WEIGHT LBS	PACKAGING INCH	UL
F00580510	PANTHER EX56 (Pump Only Foot Mount)	16 GPM	120V/60Hz	7.5	-	1"	1" / 3/4"	37	15.7 x 9.4 x 13.7	YES
F00580500	PANTHER EX56 (Pump Only)	16 GPM	120V/60Hz	7.5	-	1"	1" / 3/4"	33	15.7 x 12 x 15.7	YES
F00582500	PANTHER EX56+K90 GALLON METER KIT	16 GPM	120V/60Hz	7.5	-	1"	1" / 3/4"	33	15.7 x 12 x 15.7	YES
F00582550	PANTHER EX56+K90 LITER METER KIT	16 GPM	120V/60Hz	7.5	-	1"	1" / 3/4"	39	15.7 x 12 x 15.7	YES
F00582590	PANTHER EX56 BASIC KIT (3/4" Manual, 3/4" 13ft hose)	16 GPM	120V/60Hz	7.5	13 FT	1"	1" / 3/4"	37	15.4 x 15.4 x 15.4	YES
F00582600	PANTHER EX56 BASIC+ KIT (3/4" Auto, 3/4" 13ft hose)	16 GPM	120V/60Hz	7.5	13 FT	1"	1" / 3/4"	37	15.4 x 15.4 x 15.4	YES
F00582650	PANTHER EX56 PRO KIT GALLON (K90G Meter, 3/4" Auto)	16 GPM	120V/60Hz	7.5	13 FT	1"	1" / 3/4"	43.5	15.4 x 19.3 x 15.4	YES
F00582660	PANTHER EX56 PRO KIT LITER (K90L Meter, 3/4" Auto)	16 GPM	120V/60Hz	7.5	13 FT	1"	1" / 3/4"	43.5	15.4 x 19.3 x 15.4	YES

PANTHER EX72

UP TO 20 GPM

c UL us LISTED MOTOR

DUTY CYCLE: CONTINUOUS

DRY SUCTION HEIGHT – 10 FT.
WET SUCTION HEIGHT – 18 FT.

D G K FLUID TYPES

120V/60HZ



PART NUMBER	DETAILS	FLOW RATE	VOLT/HZ	AMP MAX	HOSE	INLET NPT	OUTLET NPT	WEIGHT LBS	PACKAGING INCH	UL
F00581500	PANTHER EX72 (Pump Only)	20 GPM	120V/60Hz	7.5	-	1"	1" / 3/4"	28.5	15.7 x 9.4 x 13.7	YES
F00583510	PANTHER EX72+K90 GALLON METER KIT	20 GPM	120V/60Hz	7.5	-	1"	1" / 3/4"	33	15.7 x 12 x 15.7	YES
F00583500	PANTHER EX72+K150 GALLON METER KIT	20 GPM	120V/60Hz	7.5	-	1"	1" / 3/4"	37	15.7 x 12 x 15.7	YES
F00583560	PANTHER EX72+K150 LITER METER KIT	20 GPM	120V/60Hz	7.5	-	1"	1" / 3/4"	37	15.7 x 12 x 15.7	YES
F00583600	PANTHER EX72 BASIC+ KIT (1" Auto, 1" 20ft hose)	20 GPM	120V/60Hz	7.5	20 FT	1"	1" / 3/4"	44.5	15.4 x 15.4 x 15.4	YES
F00583610	PANTHER EX72 PRO MAN KIT GALLON (K90G Meter, 3/4" Manual, 13ft hose)	20 GPM	120V/60Hz	7.5	13 FT	1"	1" / 3/4"	41.5	15.4 x 19.3 x 15.4	YES
F00583620	PANTHER EX72 PRO MAN KIT LITER (K90L Meter, 3/4" Manual, 13ft hose)	20 GPM	120V/60Hz	7.5	13 FT	1"	1" / 3/4"	41.5	15.4 x 19.3 x 15.4	YES
F00583650	PANTHER EX72 PRO KIT GALLON (K150G Meter, 1" Auto, 1" 20ft hose)	20 GPM	120V/60Hz	7.5	20 FT	1"	1" / 3/4"	51	23.2 x 19.3 x 15.4	YES
F00583660	PANTHER EX72 PRO KIT LITER (K150L Meter, 1" Auto, 1" 20ft hose)	20 GPM	120V/60Hz	7.5	20 FT	1"	1" / 3/4"	51	23.2 x 19.3 x 15.4	YES

EX100

UP TO 25 GPM

c UL us LISTED MOTOR

DUTY CYCLE: CONTINUOUS

DRY SUCTION HEIGHT – 13.5 FT.
WET SUCTION HEIGHT – 20 FT.

D K FLUID TYPES

120V/60HZ



PART NUMBER	DETAILS	FLOW RATE	VOLT/HZ	AMP MAX	HOSE	INLET NPT	OUTLET NPT	WEIGHT LBS	PACKAGING INCH	UL
F0039100A	EX100 (Pump Only)	25 GPM	120V/60Hz	7.5	-	1" - 1/4"	1"	62	18 x 18 x 18	YES
F0039120A	EX100+K150 GALLON METER KIT	25 GPM	120V/60Hz	7.5	-	1" - 1/4"	1"	70	24 x 12 x 24	YES
F0039121A	EX100+K150 LITER METER KIT	25 GPM	120V/60Hz	7.5	-	1" - 1/4"	1"	70	24 x 12 x 24	YES
F00391220	EX100 BASIC+ KIT (1" Auto, 1" 20ft hose)	25 GPM	120V/60Hz	7.5	20 FT	1" - 1/4"	1"	74	15.4 x 19.3 x 15.4	YES
F00391250	EX100 PRO KIT GALLON (K150G Meter, 1" Auto, 1" 20ft hose)	25 GPM	120V/60Hz	7.5	20 FT	1" - 1/4"	1"	79	23.2 x 19.3 x 15.4	YES

EX140

UP TO 37 GPM

c UL us LISTED MOTOR

DUTY CYCLE: CONTINUOUS

DRY SUCTION HEIGHT – 20 FT.
WET SUCTION HEIGHT – 24 FT.

D K FLUID TYPES

120V/60HZ



PART NUMBER	DETAILS	FLOW RATE	VOLT/HZ	AMP MAX	HOSE	INLET NPT	OUTLET NPT	WEIGHT LBS	PACKAGING INCH	UL
F0039600B	EX140 (Pump Only)	37 GPM	120V/60Hz	9	-	1" - 1/4"	1"	62	18 x 18 x 18	YES
F0039650B	EX140+K150 GALLON METER KIT	37 GPM	120V/60Hz	9	-	1" - 1/4"	1"	70	24 x 12 x 24	YES
F0039651B	EX140+K150 LITER METER KIT	37 GPM	120V/60Hz	9	-	1" - 1/4"	1"	70	24 x 12 x 24	YES
F00396520	EX140 BASIC+ KIT (1" AUTO, 1" 20FT HOSE)	37 GPM	120V/60Hz	9	20 FT	1" - 1/4"	1"	74	15.4 x 19.3 x 15.4	YES
F00396550	EX140 PRO KIT GALLON (K150G Meter, 1" Auto, 1" 20ft hose)	37 GPM	120V/60Hz	9	20 FT	1" - 1/4"	1"	80	23.2 x 19.3 x 15.4	YES
F00396560	EX140 PRO KIT LITER (K150L Meter, 1" Auto, 1" 20ft hose)	37 GPM	120V/60Hz	9	20 FT	1" - 1/4"	1"	80	23.2 x 19.3 x 15.4	YES

FLUID TYPES: (D) DIESEL (G) GASOLINE (K) KEROSENE

AVIATION PUMPS & METER

PANTHER EX72 AVIATION

NEW



UP TO 20 GPM

c UL us LISTED MOTOR

DUTY CYCLE: CONTINUOUS

DRY SUCTION HEIGHT – 10 FT.
WET SUCTION HEIGHT – 18 FT.

D G K FLUID TYPES

120V/60HZ

PART NUMBER	DETAILS	FLOW RATE	VOLT/HZ	AMP MAX	HOSE	IN-LET NPT	OUTLET NPT	WEIGHT LBS	PACKAGING INCH	UL
F00588000	PANTHER EX72 AVIATION (Pump Only)	20 GPM	120V/60Hz	7.5	-	1"	1" / 3/4"	28.5	15.7 x 9.4 x 13.7	YES

EX75 DC AVIATION

NEW



UP TO 20 GPM

c UL us LISTED MOTOR

DUTY CYCLE: 30 ON / 30 OFF

DRY SUCTION HEIGHT – 16 FT.
WET SUCTION HEIGHT – 20 FT.

D G K FLUID TYPES

12-24VDC

PART NUMBER	DETAILS	FLOW RATE	VOLT/ HZ	AMP MAX	HOSE	INLET NPT	OUTLET NPT	WEIGHT LBS	PACKAGING INCH	UL
F00388000	EX75DC AVIATION 12V 20GPM (Pump Only)	20 GPM	12 VDC	20	-	1"	-	20	7.5 x 14 x 10	YES

EX140 AVIATION

NEW



UP TO 37 GPM

c UL us LISTED MOTOR

DUTY CYCLE: CONTINUOUS

DRY SUCTION HEIGHT – 20 FT.
WET SUCTION HEIGHT – 24 FT.

D K FLUID TYPES

120V/60HZ

PART NUMBER	DETAILS	FLOW RATE	VOLT/HZ	AMP MAX	HOSE	INLET NPT	OUTLET NPT	WEIGHT LBS	PACKAGING INCH	UL
F00396900	EX140 AVIATION (Pump Only)	37 GPM	120V/60Hz	9	-	1" - 1/4"	1"	62	18 x 18 x 18	YES

K150 AVIATION METER

NEW



c UL us LISTED MOTOR

D G K FLUID TYPES

PART NUMBER	DETAILS	FLOW RATE	FLOW DIRECTION	INLET/OUT-LET	WEIGHT LBS	PACKAGING INCH	UL
F00559000	K150 AVIATION - GALLON VERSION B	7-40 GPM		1"	5	7 x 7 x 6.5	YES

EXTREME 16

NEW

UP TO 16 GPM

c UL us LISTED MOTOR

DUTY CYCLE: CONTINUOUS

DRY SUCTION HEIGHT – 16 FT.
WET SUCTION HEIGHT – 20 FT.

D G K FLUID TYPES

12-24VDC



PART NUMBER	DETAILS	FLOW RATE	VOLT/HZ	AMP MAX	HOSE	INLET NPT	OUTLET NPT	WEIGHT LBS	PACKAGING INCH	UL
F00382600	EXTREME 16 (Pump Only)	16 GPM	12-24 VDC	20	-	1"	3/4" with flange	22.6	14 x 7.5 x 11.5	YES
F00382610	EXTREME 16 BASIC KIT (3/4" Manual, 3/4" 13ft hose)	16 GPM	12-24 VDC	20	13 FT	1"	3/4" with flange	30	23 x 15 x 10	YES
F00382620	EXTREME 16 BASIC+ KIT (3/4" AUTO, 3/4" 13FT HOSE)	16 GPM	12-24 VDC	20	13 FT	1"	3/4" with flange	31.5	23 x 15 x 10	YES
F00382650	EXTREME 16 PRO GALLON KIT (3/4" Auto, 3/4" 13ft hose, K90G)	16 GPM	12-24 VDC	20	13 FT	1"	3/4" with flange	36.2	23 x 15 x 10	YES
F00382660	EXTREME 16 PRO LITER KIT (3/4" Auto, 3/4" 13ft hose, K90L)	16 GPM	12-24 VDC	20	13 FT	1"	3/4" with flange	36.2	23 x 15 x 10	YES
F003826F0	EXTREME 16 12VDC/24VDC (P/O Foot Mount)	16 GPM	12-24 VDC	20	NO	1"	3/4" with flange	22	14 x 7.5 x 11.5	YES

EXTREME 20

NEW

UP TO 20 GPM

c UL us LISTED MOTOR

DUTY CYCLE: CONTINUOUS

DRY SUCTION HEIGHT – 16 FT.
WET SUCTION HEIGHT – 20 FT.

D G K FLUID TYPES

12-24VDC



PART NUMBER	DETAILS	FLOW RATE	VOLT/HZ	AMP MAX	HOSE	INLET NPT	OUTLET NPT	WEIGHT LBS	PACKAGING INCH	UL
F00382500	EXTREME 20 (Pump Only)	20 GPM	12-24 VDC	20	-	1"	1"	22.6	14 x 7.5 x 11.5	YES
F00382510	EXTREME 20 BASIC KIT (1" Manual, 1" 20ft hose)	20 GPM	12-24 VDC	20	20 FT	1"	1"	35	23 x 15 x 10	YES
F00382520	EXTREME 20 BASIC+ KIT (1" AUTO, 1" 20FT HOSE)	20 GPM	12-24 VDC	20	20 FT	1"	1"	37	23 x 15 x 10	YES
F00382550	EXTREME 20 PRO GALLON KIT (1" Auto, 1" 20ft hose, K90G)	20 GPM	12-24 VDC	20	20 FT	1"	1"	42	23 x 15 x 10	YES
F00382560	EXTREME 20 PRO LITER KIT (1" Auto, 1" 20ft hose, K90L)	20 GPM	12-24 VDC	20	20 FT	1"	1"	42	23 x 15 x 10	YES
F003825F0	EXTREME 20 12VDC/24VDC (P/O Foot Mount)	20 GPM	12-24 VDC	20	NO	1"	1"	22	14 x 7.5 x 11.5	YES

DC FUEL PUMPS

PIUSI

EX50

UP TO 15 GPM

c UL us LISTED MOTOR

DUTY CYCLE: 30 ON / 30 OFF

DRY SUCTION HEIGHT – 14 FT.
WET SUCTION HEIGHT – 20 FT.

D G K FLUID TYPES

12VDC



PART NUMBER	DETAILS	FLOW RATE	VOLT/HZ	AMP MAX	HOSE	INLET NPT	OUTLET NPT	WEIGHT LBS	PACKAGING INCH	UL
F0037250D	EX50 12V (Pump Only)	15 GPM	12 VDC	21	-	1"	-	20	7.5 x 14 x 10	YES
F0037150A	EX50 12V (Pump Only Foot Mount)	15 GPM	12 VDC	21	-	1"	3/4"	20	7.5 x 14 x 10	YES
F0037252A	EX50 BASIC KIT (3/4" MANUAL, 3/4" 13FT HOSE)	15 GPM	12 VDC	17	13 FT	1"	3/4"	31	15 x 18 x 10	YES
F0037251D	EX50 BASIC+ KIT (3/4" Auto, 3/4" 13ft hose)	15 GPM	12 VDC	17	13 FT	1"	3/4"	33.5	15 x 18 x 10	YES
F00375550	EX50 PRO MAN KIT (3/4" Manual, K90G Meter, 3/4" 13ft hose)	15 GPM	12 VDC	17	13 FT	1"	3/4"	35	15 x 18 x 10	YES
F0037550E	EX50 PRO GALLON KIT (3/4" Auto, K90G Meter, 3/4" 13ft hose)	15 GPM	12 VDC	17	13 FT	1"	3/4"	37	15 x 18 x 10	YES

EX75

UP TO 20 GPM

c UL us LISTED MOTOR

DUTY CYCLE: 30 ON / 30 OFF

DRY SUCTION HEIGHT – 16 FT.
WET SUCTION HEIGHT – 20 FT.

D G K FLUID TYPES

12VDC



PART NUMBER	DETAILS	FLOW RATE	VOLT/HZ	AMP MAX	HOSE	INLET NPT	OUTLET NPT	WEIGHT LBS	PACKAGING INCH	UL
F00378500	EX75 12V 20GPM (Pump Only)	20 GPM	12 VDC	20	-	1"	-	20	7.5 x 14 x 10	YES
F00380500	EX75 12V 20GPM (Pump Only Foot Mount)	20 GPM	12 VDC	20	-	1"	-	20	7.5 x 14 x 10	YES
F00378530	EX75 BASIC KIT (1" MANUAL, 1" 13FT HOSE)	20 GPM	12 VDC	20	13 FT	1"	3/4"	33	15 x 18 x 10	YES
F0037851A	EX75 BASIC+ KIT (1" Auto, 1" 13ft hose)	20 GPM	12 VDC	20	13 FT	1"	3/4"	35.5	15 x 22 x 15	YES
F0037852A	EX75 BASIC+ 20FT KIT (1" Auto, 1" 20ft hose)	20 GPM	12 VDC	20	20 FT	1"	3/4"	42	14.5 x 19 x 10.5	YES
F0037950B	EX75 PRO KIT (1" Auto, K90G Meter, 1" 13ft hose)	20 GPM	12 VDC	20	13 FT	1"	3/4"	37	15 x 18 x 10	YES

BIPUMP

UP TO 25 GPM


DUTY CYCLE: 30 ON / 30 OFF

12 or 24VDC


D DIESEL ONLY



PART NUMBER	DETAILS	FLOW RATE	VOLT/HZ	AMP MAX	HOSE	INLET NPT	OUTLET NPT	WEIGHT LBS	PACKAGING INCH	UL
F0036305A	BI-PUMP (Pump Only) - 12VDC	25 GPM	12 VDC	42	-	1"	1"	30	18 x 12 x 12	-
F0036306A	BI-PUMP (Pump Only) - 24VDC	25 GPM	24 VDC	22	-	1"	1"	30	18 x 12 x 12	-
F0022220A	BI-PUMP BASIC+ KIT (AUTO, 1" 20FT HOSE)	25 GPM	12 VDC	42	20 FT	1"	1"	44	20 x 20 x 20	-

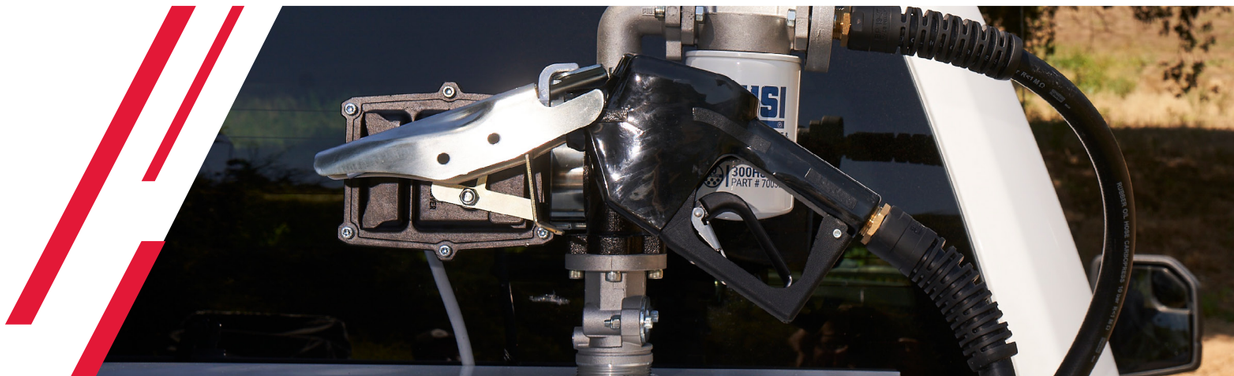

CONTINUOUS DUTY AC PUMP

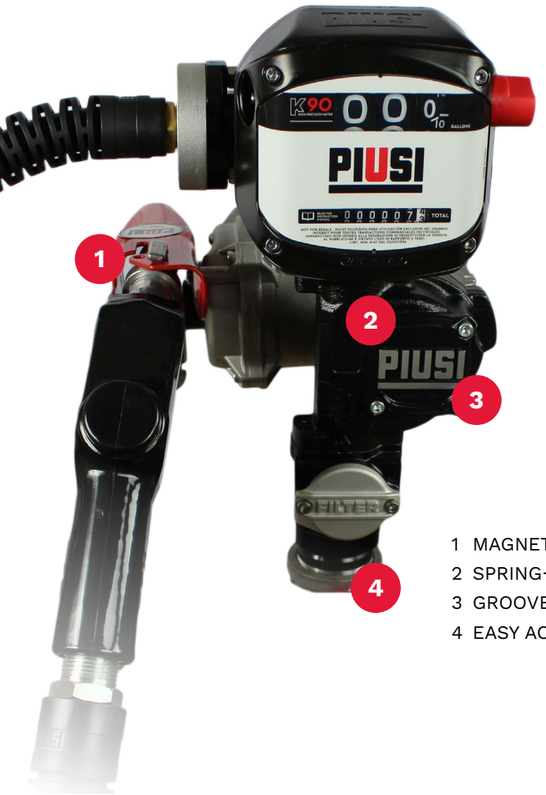

UP TO 16 GPM

c UL us LISTED MOTOR

DUTY CYCLE: CONTINUOUS

D G K FLUID TYPES

K90 +/- 0.6% ACCURACY

120V/60HZ


DRY SUCTION HEIGHT – 10 FT.
WET SUCTION HEIGHT – 18 FT.

PRO KIT

INCLUDES:

- cUL/UL-LISTED FUEL TRANSFER PUMP
- K90 MECHANICAL METER (GAL or LIT)
- NOZZLE HOLDER
- FLANGES + TANK ADAPTER
- AUTO NOZZLE 3/4”

1 MAGNETIC SWITCH
2 SPRING-LOADED VANE
3 GROOVED ROTOR
4 EASY ACCESS FILTER STRAINER

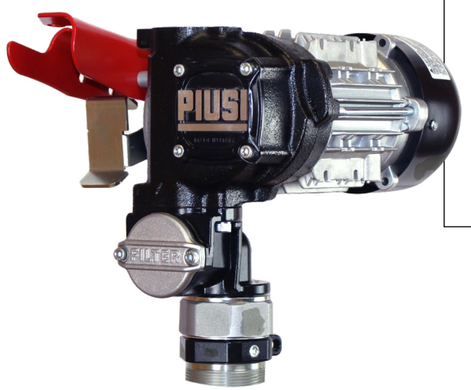

PUMP ONLY

INCLUDES:

- cUL/UL-LISTED FUEL TRANSFER PUMP
- NOZZLE HOLDER
- FLANGES + TANK ADAPTER

FUEL TRANSFER PUMP
PANTHER EX56

PIUSI

CONTINUOUS DUTY AC PUMP

BASIC KIT

INCLUDES:

- cUL/UL-LISTED FUEL TRANSFER PUMP
- NOZZLE HOLDER
- FLANGES + TANK ADAPTER
- MANUAL NOZZLE 3/4”



BASIC+ KIT

INCLUDES:

- cUL/UL-LISTED FUEL TRANSFER PUMP
- NOZZLE HOLDER
- FLANGES + TANK ADAPTER
- AUTOMATIC NOZZLE 3/4”



PART NUMBER	DETAILS	FLOW RATE	VOLT/HZ	AMP MAX	HOSE	INLET NPT	OUTLET NPT	WEIGHT LBS	PACKAGING INCH	UL
F00580510	PANTHER EX56 (Pump Only Foot Mount)	16 GPM	120V/60Hz	7.5	-	1"	1" / 3/4"	37	15.7 x 9.4 x 13.7	YES
F00580500	PANTHER EX56 (Pump Only)	16 GPM	120V/60Hz	7.5	-	1"	1" / 3/4"	33	15.7 x 12 x 15.7	YES
F00582500	PANTHER EX56+K90 GALLON METER KIT	16 GPM	120V/60Hz	7.5	-	1"	1" / 3/4"	33	15.7 x 12 x 15.7	YES
F00582550	PANTHER EX56+K90 LITER METER KIT	16 GPM	120V/60Hz	7.5	-	1"	1" / 3/4"	39	15.7 x 12 x 15.7	YES
F00582590	PANTHER EX56 BASIC KIT (3/4" Manual, 3/4" 13ft hose)	16 GPM	120V/60Hz	7.5	13 FT	1"	1" / 3/4"	37	15.4 x 15.4 x 15.4	YES
F00582600	PANTHER EX56 BASIC+ KIT (3/4" Auto, 3/4" 13ft hose)	16 GPM	120V/60Hz	7.5	13 FT	1"	1" / 3/4"	37	15.4 x 15.4 x 15.4	YES
F00582650	PANTHER EX56 PRO KIT GALLON (K90G Meter, 3/4" Auto)	16 GPM	120V/60Hz	7.5	13 FT	1"	1" / 3/4"	43.5	15.4 x 19.3 x 15.4	YES
F00582660	PANTHER EX56 PRO KIT LITER (K90L Meter, 3/4" Auto)	16 GPM	120V/60Hz	7.5	13 FT	1"	1" / 3/4"	43.5	15.4 x 19.3 x 15.4	YES

FUEL TRANSFER PUMP

PANTHER EX72

CONTINUOUS DUTY AC PUMP



UP TO
20
GPM

LISTED
MOTOR

DUTY CYCLE: CONTINUOUS

D G K FLUID TYPES

K150 +/- 1% ACCURACY

120V/60HZ

DRY SUCTION HEIGHT – 10 FT.
WET SUCTION HEIGHT – 18 FT.

PRO KIT

INCLUDES:

- cUL/UL-LISTED FUEL TRANSFER PUMP
- K150 MECHANICAL METER (GAL or LIT)
- NOZZLE HOLDER
- FLANGES + TANK ADAPTER
- AUTO NOZZLE 1”

1 MAGNETIC SWITCH
2 SPRING-LOADED VANE
3 GROOVED ROTOR
4 EASY ACCESS FILTER STRAINER



PRO MANUAL KIT

INCLUDES:

- cUL/UL-LISTED FUEL TRANSFER PUMP
- K90 MECHANICAL METER (GAL or LIT)
- NOZZLE HOLDER
- FLANGES + TANK ADAPTER
- MANUAL NOZZLE 3/4”

FUEL TRANSFER PUMP


PANTHER EX72

CONTINUOUS DUTY AC PUMP

PUMP ONLY

INCLUDES:

- cUL/UL-LISTED FUEL TRANSFER PUMP
- NOZZLE HOLDER
- FLANGES + TANK ADAPTER

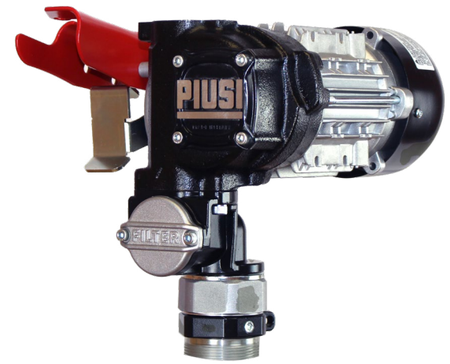

BASIC+ KIT

INCLUDES:

- cUL/UL-LISTED FUEL TRANSFER PUMP
- FLANGES + TANK ADAPTER
- AUTOMATIC NOZZLE 1” or 3/4”



PART NUMBER	DETAILS	FLOW RATE	VOLT/HZ	AMP MAX	HOSE	INLET NPT	OUTLET NPT	WEIGHT LBS	PACKAGING INCH	UL
F00581500	PANTHER EX72 (Pump Only)	20 GPM	120V/60Hz	7.5	-	1"	1" / 3/4"	28.5	15.7 x 9.4 x 13.7	YES
F00583510	PANTHER EX72+K90 GALLON METER KIT	20 GPM	120V/60Hz	7.5	-	1"	1" / 3/4"	33	15.7 x 12 x 15.7	YES
F00583500	PANTHER EX72+K150 GALLON METER KIT	20 GPM	120V/60Hz	7.5	-	1"	1" / 3/4"	37	15.7 x 12 x 15.7	YES
F00583560	PANTHER EX72+K150 LITER METER KIT	20 GPM	120V/60Hz	7.5	-	1"	1" / 3/4"	37	15.7 x 12 x 15.7	YES
F00583600	PANTHER EX72 BASIC+ KIT (1" Auto, 1" 20ft hose)	20 GPM	120V/60Hz	7.5	20 FT	1"	1" / 3/4"	44.5	15.4 x 15.4 x 15.4	YES
F00583610	PANTHER EX72 PRO MAN KIT GALLON (K90G Meter, 3/4" Manual, 13ft hose)	20 GPM	120V/60Hz	7.5	13 FT	1"	1" / 3/4"	41.5	15.4 x 19.3 x 15.4	YES
F00583620	PANTHER EX72 PRO MAN KIT LITER (K90L Meter, 3/4" Manual, 13ft hose)	20 GPM	120V/60Hz	7.5	13 FT	1"	1" / 3/4"	41.5	15.4 x 19.3 x 15.4	YES
F00583650	PANTHER EX72 PRO KIT GALLON (K150G Meter, 1" Auto, 1" 20ft hose)	20 GPM	120V/60Hz	7.5	20 FT	1"	1" / 3/4"	51	23.2 x 19.3 x 15.4	YES
F00583660	PANTHER EX72 PRO KIT LITER (K150L Meter, 1" Auto, 1" 20ft hose)	20 GPM	120V/60Hz	7.5	20 FT	1"	1" / 3/4"	51	23.2 x 19.3 x 15.4	YES

CONTINUOUS DUTY AC PUMP



UP TO
25
GPM

c UL us
LISTED
MOTOR

DUTY CYCLE: CONTINUOUS

FLUID TYPES

K150 +/- 1% ACCURACY

120V/60HZ

DRY SUCTION HEIGHT – 13.5 FT.
WET SUCTION HEIGHT – 20 FT.

PRO KIT

INCLUDES:

- cUL/UL-LISTED FUEL TRANSFER PUMP
- NOZZLE HOLDER
- FLANGES & TANK ADAPTER
- A120 AUTOMATIC NOZZLE
- 20FT ANTI-KINK DELIVERY HOSE
- K150 MECHANICAL FLOW METER (GAL)
- 90° STREET ELBOW
- CENTER MOUNT BUNG ADAPTER

PART NUMBER	DETAILS	FLOW RATE	VOLT/HZ	AMP MAX	HOSE	INLET NPT	OUTLET NPT	WEIGHT LBS	PACKAGING INCH	UL
F0039100A	EX100 (Pump Only)	25 GPM	120V/60Hz	7.5	-	1" - 1/4"	1"	62	18 x 18 x 18	YES
F0039120A	EX100+K150 GALLON METER KIT	25 GPM	120V/60Hz	7.5	-	1" - 1/4"	1"	70	24 x 12 x 24	YES
F0039121A	EX100+K150 LITER METER KIT	25 GPM	120V/60Hz	7.5	-	1" - 1/4"	1"	70	24 x 12 x 24	YES
F00391220	EX100 BASIC+ KIT (1" Auto, 1" 20ft hose)	25 GPM	120V/60Hz	7.5	20 FT	1" - 1/4"	1"	74	15.4 x 19.3 x 15.4	YES
F00391250	EX100 PRO KIT GALLON (K150G Meter, 1" Auto, 1" 20ft hose)	25 GPM	120V/60Hz	7.5	20 FT	1" - 1/4"	1"	79	23.2 x 19.3 x 15.4	YES


FUEL TRANSFER PUMP
EX100

CONTINUOUS DUTY AC PUMP

PUMP ONLY

INCLUDES:

- cUL/UL-LISTED FUEL TRANSFER PUMP
- NOZZLE HOLDER
- FLANGES
- 90° STREET ELBOW
- CENTER MOUNT BUNG ADAPTER

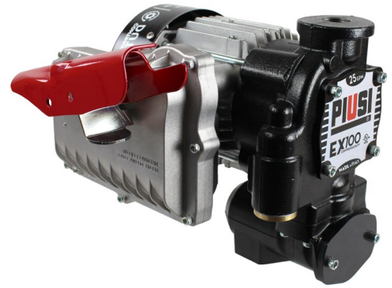

BASIC+ KIT

INCLUDES:

- cUL/UL-LISTED FUEL TRANSFER PUMP
- NOZZLE HOLDER
- FLANGES + TANK ADAPTER
- A120 AUTOMATIC NOZZLE
- 20FT ANTI-KINK DELIVERY HOSE
- 90° STREET ELBOW
- CENTER MOUNT BUNG ADAPTER



DETAILS & ACCESSORIES



K150 METER



A120 AUTOMATIC NOZZLE



90° ELBOW



SWITCH HOUSING

FUEL TRANSFER PUMP

EX140

CONTINUOUS DUTY AC PUMP



UP TO
37
GPM

c UL us
LISTED
MOTOR

DUTY CYCLE: CONTINUOUS

FLUID TYPES

K150 +/- 1% ACCURACY

120V/60HZ

DRY SUCTION HEIGHT – 20 FT.
WET SUCTION HEIGHT – 24 FT.

PRO KIT

INCLUDES:

- cUL/UL-LISTED FUEL TRANSFER PUMP
- NOZZLE HOLDER
- FLANGES & TANK ADAPTER
- A140 AUTOMATIC NOZZLE
- 20FT ANTI-KINK DELIVERY HOSE
- K150 MECHANICAL FLOW METER (GAL)
- 90° STREET ELBOW
- CENTER MOUNT BUNG ADAPTER

PART NUMBER	DETAILS	FLOW RATE	VOLT/HZ	AMP MAX	HOSE	INLET NPT	OUTLET NPT	WEIGHT LBS	PACKAGING INCH	UL
F0039600B	EX140 (Pump Only)	37 GPM	120V/60Hz	9	-	1" - 1/4"	1"	62	18 x 18 x 18	YES
F0039650B	EX140+K150 GALLON METER KIT	37 GPM	120V/60Hz	9	-	1" - 1/4"	1"	70	24 x 12 x 24	YES
F0039651B	EX140+K150 LITER METER KIT	37 GPM	120V/60Hz	9	-	1" - 1/4"	1"	70	24 x 12 x 24	YES
F00396520	EX140 BASIC+ KIT (1" AUTO, 1" 20FT HOSE)	37 GPM	120V/60Hz	9	20 FT	1" - 1/4"	1"	74	15.4 x 19.3 x 15.4	YES
F00396550	EX140 PRO KIT GALLON (K150G Meter, 1" Auto, 1" 20ft hose)	37 GPM	120V/60Hz	9	20 FT	1" - 1/4"	1"	80	23.2 x 19.3 x 15.4	YES
F00396560	EX140 PRO KIT LITER (K150L Meter, 1" Auto, 1" 20ft hose)	37 GPM	120V/60Hz	9	20 FT	1" - 1/4"	1"	80	23.2 x 19.3 x 15.4	YES

FLUID TYPES: (D) DIESEL (G) GASOLINE (K) KEROSENE

FUEL TRANSFER PUMP

EX140

CONTINUOUS DUTY AC PUMP

PUMP ONLY

INCLUDES:


- cUL/UL-LISTED FUEL TRANSFER PUMP
- NOZZLE HOLDER
- FLANGES
- 90° STREET ELBOW
- CENTER MOUNT BUNG ADAPTER



BASIC+ KIT

INCLUDES:

- cUL/UL-LISTED FUEL TRANSFER PUMP
- NOZZLE HOLDER
- FLANGES & TANK ADAPTER
- A140 AUTOMATIC NOZZLE
- 20FT ANTI-KINK DELIVERY HOSE
- 90° STREET ELBOW
- CENTER MOUNT BUNG ADAPTER

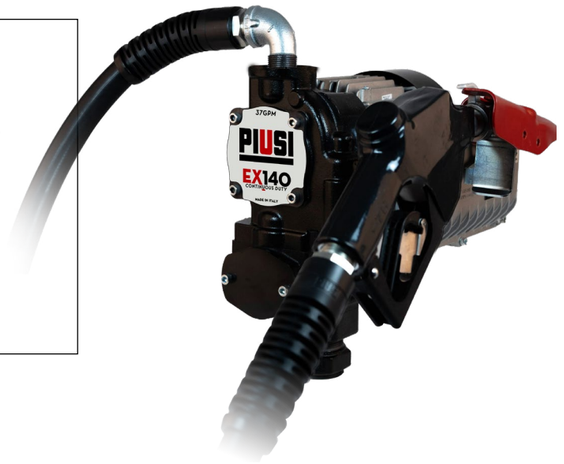

DETAILS & ACCESSORIES



K150 METER



A140 AUTOMATIC NOZZLE



90° ELBOW



SWITCH HOUSING

EXTREME 16

CONTINUOUS DUTY DC PUMP

UP TO 16 GPM

c UL us LISTED MOTOR



1 ANTI-KINK HOSE PREVENTS KINKING IN TIGHT TURNS.

2 BOLT-ON FLANGES MAKE IT EASIER TO ORIENT AND INSTALL WITHOUT HAVING TO MOVE THE TANK AROUND.

3 SPRING-LOADED, REINFORCED VANES PROVIDE HIGHER SUCTION CAPABILITY AND MAINTAIN CONSISTENT PRESSURE AND FLUID DISPLACEMENT AT ALL TIMES—MAKING IT LESS SUSCEPTIBLE TO VAPOR LOCK!

4 MAGNETIC SWITCH MAKES OPERATIONS SAFER, MORE RELIABLE, AND REQUIRES LESS MAINTENANCE.

DUTY CYCLE: CONTINUOUS

D G K FLUID TYPES

K90 +/- 0.6% ACCURACY

12-24VDC

DRY SUCTION HEIGHT – 16 FT.
WET SUCTION HEIGHT – 20 FT.

PRO KIT NEW

INCLUDES:

- cUL/UL-LISTED FUEL TRANSFER PUMP
- NOZZLE HOLDER
- FLANGES + TANK ADAPTER
- TELESCOPIC PIPE
- POWER SUPPLY CABLE
- A60 AUTOMATIC NOZZLE
- 13FT ANTI-KINK DELIVERY HOSE
- K90 UL MECHANICAL FLOW METER
- 2” CONNECTOR

PART NUMBER	DETAILS	FLOW RATE	VOLT/HZ	AMP MAX	HOSE	INLET NPT	OUTLET NPT	WEIGHT LBS	PACKAGING INCH	UL
F00382600	EXTREME 16 (Pump Only)	16 GPM	12-24 VDC	20	-	1"	3/4" with flange*	22.6	14 x 7.5 x 11.5	YES
F00382610	EXTREME 16 BASIC KIT (3/4" Manual, 3/4" 13ft hose)	16 GPM	12-24 VDC	20	13 FT	1"	3/4" with flange*	30	23 x 15 x 10	YES
F00382620	EXTREME 16 BASIC+ KIT (3/4" AUTO, 3/4" 13FT HOSE)	16 GPM	12-24 VDC	20	13 FT	1"	3/4" with flange*	31.5	23 x 15 x 10	YES
F00382650	EXTREME 16 PRO GALLON KIT (3/4" Auto, 3/4" 13ft hose, K90G)	16 GPM	12-24 VDC	20	13 FT	1"	3/4" with flange	36.2	23 x 15 x 10	YES
F00382660	EXTREME 16 PRO LITER KIT (3/4" Auto, 3/4" 13ft hose, K90L)	16 GPM	12-24 VDC	20	13 FT	1"	3/4" with flange	36.2	23 x 15 x 10	YES

*OUTLET STREET ELBOW: 3/4”

FUEL TRANSFER PUMP

EXTREME 16

CONTINUOUS DUTY DC PUMP

PUMP ONLY NEW

INCLUDES:

- cUL/UL-LISTED FUEL TRANSFER PUMP
- NOZZLE HOLDER
- FLANGES + TANK ADAPTER
- THERMAL PROTECTION
- POWER SUPPLY CABLE
- PROTECTED AGAINST:
  - REVERSE POLARITY
  - OVERVOLTAGE
  - LOCKED ROTOR
  - OVERCURRENT



BASIC+ KIT NEW

INCLUDES:

- cUL/UL-LISTED FUEL TRANSFER PUMP
- NOZZLE HOLDER
- FLANGES + TANK ADAPTER
- TELESCOPIC PIPE
- POWER SUPPLY CABLE
- A60 AUTOMATIC NOZZLE
- 13FT ANTI-KINK DELIVERY HOSE
- 2” CONNECTOR



DETAILS & ACCESSORIES



K90 METER



A60 AUTOMATIC NOZZLE



2” CONNECTOR

CONTINUOUS DUTY DC PUMP



UP TO 20 GPM

c UL us LISTED MOTOR

DUTY CYCLE: CONTINUOUS

D G K FLUID TYPES

K90 +/- 0.6% ACCURACY

12-24VDC

DRY SUCTION HEIGHT – 16 FT.
WET SUCTION HEIGHT – 20 FT.

PRO KIT NEW

INCLUDES:

- cUL/UL-LISTED FUEL TRANSFER PUMP
- NOZZLE HOLDER
- FLANGES + TANK ADAPTER
- TELESCOPIC PIPE
- POWER SUPPLY CABLE
- A120 AUTOMATIC NOZZLE
- 20FT ANTI-KINK DELIVERY HOSE
- K90 UL MECHANICAL FLOW METER
- 90° STREET ELBOW

1 ANTI-KINK HOSE PREVENTS KINKING IN TIGHT TURNS.

2 BOLT-ON FLANGES MAKE IT EASIER TO ORIENT AND INSTALL WITHOUT HAVING TO MOVE THE TANK AROUND.

3 SPRING-LOADED, REINFORCED VANES PROVIDE HIGHER SUCTION CAPABILITY AND MAINTAIN CONSISTENT PRESSURE AND FLUID DISPLACEMENT AT ALL TIMES—MAKING IT LESS SUSCEPTIBLE TO VAPOR LOCK!

4 MAGNETIC SWITCH MAKES OPERATIONS SAFER, MORE RELIABLE, AND REQUIRES LESS MAINTENANCE.

PART NUMBER	DETAILS	FLOW RATE	VOLT/HZ	AMP MAX	HOSE	INLET NPT	OUTLET NPT	WEIGHT LBS	PACKAGING INCH	UL
F00382500	EXTREME 20 (Pump Only)	20 GPM	12-24 VDC	20	-	1"	1"*	22.6	14 x 7.5 x 11.5	YES
F00382510	EXTREME 20 BASIC KIT (1" Manual, 1" 20ft hose)	20 GPM	12-24 VDC	20	20 FT	1"	1"*	35	23 x 15 x 10	YES
F00382520	EXTREME 20 BASIC+ KIT (1" AUTO, 1" 20FT HOSE)	20 GPM	12-24 VDC	20	20 FT	1"	1"*	37	23 x 15 x 10	YES
F00382550	EXTREME 20 PRO GALLON KIT (1" Auto, 1" 20ft hose, K90G)	20 GPM	12-24 VDC	20	20 FT	1"	1"	42	23 x 15 x 10	YES
F00382560	EXTREME 20 PRO LITER KIT (1" Auto, 1" 20ft hose, K90l)	20 GPM	12-24 VDC	20	20 FT	1"	1"	42	23 x 15 x 10	YES

*OUTLET STREET ELBOW: 1”

FUEL TRANSFER PUMP
EXTREME 20

PIUSI

CONTINUOUS DUTY DC PUMP

PUMP ONLY NEW

INCLUDES:

- cUL/UL-LISTED FUEL TRANSFER PUMP
- NOZZLE HOLDER
- FLANGES + TANK ADAPTER
- THERMAL PROTECTION
- POWER SUPPLY CABLE
- PROTECTED AGAINST:
  - REVERSE POLARITY
  - OVERVOLTAGE
  - LOCKED ROTOR
  - OVERCURRENT



BASIC+ KIT NEW

INCLUDES:

- cUL/UL-LISTED FUEL TRANSFER PUMP
- NOZZLE HOLDER
- FLANGES + TANK ADAPTER
- TELESCOPIC PIPE
- POWER SUPPLY CABLE
- A120 AUTOMATIC NOZZLE
- 20FT ANTI-KINK DELIVERY HOSE
- 90° STREET ELBOW



DETAILS & ACCESSORIES



K90 METER



A120 AUTOMATIC NOZZLE



2” CONNECTOR



UP TO
15
GPM

c UL us
LISTED
MOTOR

DUTY CYCLE:
30 ON / 30 OFF

D G K FLUID TYPES

K90 +/- 0.6% ACCURACY

12VDC

DRY SUCTION HEIGHT – 14 FT.
WET SUCTION HEIGHT – 20 FT.

PRO KIT

INCLUDES:

- cUL/UL-LISTED FUEL TRANSFER PUMP
- K90 MECHANICAL METER (GAL or LIT)
- NOZZLE HOLDER
- FLANGES + TANK ADAPTER
- AUTO NOZZLE 3/4”



PUMP ONLY

INCLUDES:

- cUL/UL-LISTED FUEL TRANSFER PUMP
- NOZZLE HOLDER
- FLANGES + TANK ADAPTER

FUEL TRANSFER PUMP
EX50

BASIC KIT

INCLUDES:

- cUL/UL-LISTED FUEL TRANSFER PUMP
- NOZZLE HOLDER
- FLANGES + TANK ADAPTER
- MANUAL NOZZLE 3/4”



BASIC+ KIT

INCLUDES:

- cUL/UL-LISTED FUEL TRANSFER PUMP
- NOZZLE HOLDER
- FLANGES + TANK ADAPTER
- AUTOMATIC NOZZLE 3/4”



PART NUMBER	DETAILS	FLOW RATE	VOLT/HZ	AMP MAX	HOSE	INLET NPT	OUTLET NPT	WEIGHT LBS	PACKAGING INCH	UL
F0037250D	EX50 12V (Pump Only)	15 GPM	12 VDC	21	-	1"	-	20	7.5 x 14 x 10	YES
F0037150A	EX50 12V (Pump Only Foot Mount)	15 GPM	12 VDC	21	-	1"	3/4"	20	7.5 x 14 x 10	YES
F0037252A	EX50 BASIC KIT (3/4" MANUAL, 3/4" 13FT HOSE)	15 GPM	12 VDC	17	13 FT	1"	3/4"	31	15 x 18 x 10	YES
F0037251D	EX50 BASIC+ KIT (3/4" Auto, 3/4" 13ft hose)	15 GPM	12 VDC	17	13 FT	1"	3/4"	33.5	15 x 18 x 10	YES
F00375550	EX50 PRO MAN KIT (3/4" Manual, K90G Meter, 3/4" 13ft hose)	15 GPM	12 VDC	17	13 FT	1"	3/4"	35	15 x 18 x 10	YES
F0037550E	EX50 PRO GALLON KIT (3/4" Auto, K90G Meter, 3/4" 13ft hose)	15 GPM	12 VDC	17	13 FT	1"	3/4"	37	15 x 18 x 10	YES



UP TO
15
GPM

c UL us
LISTED
MOTOR

DUTY CYCLE:
30 ON / 30 OFF

D G K FLUID TYPES

K90 +/- 0.6% ACCURACY

12VDC

DRY SUCTION HEIGHT – 16 FT.
WET SUCTION HEIGHT – 20 FT.

PRO KIT

INCLUDES:

- cUL/UL-LISTED FUEL TRANSFER PUMP
- K90 MECHANICAL METER (GAL or LIT)
- NOZZLE HOLDER
- FLANGES + TANK ADAPTER
- AUTO NOZZLE 1”



PUMP ONLY

INCLUDES:

- cUL/UL-LISTED FUEL TRANSFER PUMP
- NOZZLE HOLDER
- FLANGES + TANK ADAPTER

FUEL TRANSFER PUMP
EX75

BASIC KIT

INCLUDES:

- cUL/UL-LISTED FUEL TRANSFER PUMP
- NOZZLE HOLDER
- FLANGES + TANK ADAPTER
- MANUAL NOZZLE 1”



BASIC+ KIT

INCLUDES:

- cUL/UL-LISTED FUEL TRANSFER PUMP
- NOZZLE HOLDER
- FLANGES + TANK ADAPTER
- AUTOMATIC NOZZLE 1”



PART NUMBER	DETAILS	FLOW RATE	VOLT/HZ	AMP MAX	HOSE	INLET NPT	OUTLET NPT	WEIGHT LBS	PACKAGING INCH	UL
F00378500	EX75 12V 20GPM (Pump Only)	20 GPM	12 VDC	20	-	1"	-	20	7.5 x 14 x 10	YES
F00380500	EX75 12V 20GPM (Pump Only Foot Mount)	20 GPM	12 VDC	20	-	1"	-	20	7.5 x 14 x 10	YES
F00378530	EX75 BASIC KIT (1" MANUAL, 1" 13FT HOSE)	20 GPM	12 VDC	20	13 FT	1"	3/4"	33	15 x 18 x 10	YES
F0037851A	EX75 BASIC+ KIT (1" Auto, 1" 13ft hose)	20 GPM	12 VDC	20	13 FT	1"	3/4"	35.5	15 x 22 x 15	YES
F0037852A	EX75 BASIC+ 20FT KIT (1" Auto, 1" 20ft hose)	20 GPM	12 VDC	20	20 FT	1"	3/4"	42	14.5 x 19 x 10.5	YES
F0037950B	EX75 PRO KIT (1" Auto, K90G Meter, 1" 13ft hose)	20 GPM	12 VDC	20	13 FT	1"	3/4"	37	15 x 18 x 10	YES

FUEL TRANSFER PUMP

BIPUMP – DIESEL

With the highest flow rate in the DC range, the BIPUMP is a heavy-duty, dual-motor vane pump that can empty 750 gallons of diesel before reaching its duty cycle limit. **Ideal for any off-road, battery-powered operation that requires high volume quickly.**

UP TO 25 GPM

DUTY CYCLE: 30 ON / 30 OFF

DIESEL ONLY

INLET: 1” NPT

12 or 24VDC



// ON/OFF SWITCH
// FLANGED CONNECTIONS
// HEAVY-DUTY
// HIGH-FLOW DIESEL TRANSFER

BIPUMP KIT


INCLUDES:

- AUTOMATIC NOZZLE
- 20FT DELIVERY HOSE
- TELESCOPIC DOWNTUBE
- A120 NOZZLE

PUMP ONLY

INCLUDES:

- HEAVY-DUTY, HIGH-FLOW DIESEL TRANSFER
- DUAL MOTOR/DUAL PUMP
- BYPASS VALVE BUILT INTO PUMP BODY
- 13FT POWER CABLE WITH INTEGRATED ON/OFF SWITCH

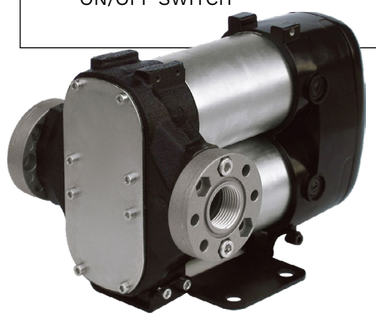

DETAILS & ACCESSORIES



ON/OFF SWITCH



FLANGED CONNECTIONS



A120 NOZZLE

PART NUMBER	DETAILS	FLOW RATE	VOLT/HZ	AMP MAX	HOSE	INLET NPT	OUTLET NPT	WEIGHT LBS	PACKAGING INCH	UL
F0036305A	BI-PUMP (Pump Only) - 12VDC	25 GPM	12 VDC	42	-	1"	1"	30	18 x 12 x 12	-
F0036306A	BI-PUMP (Pump Only) - 24VDC	25 GPM	24 VDC	22	-	1"	1"	30	18 x 12 x 12	-
F0022220A	BI-PUMP BASIC+ KIT (AUTO, 1" 20FT HOSE)	25 GPM	12 VDC	42	20 FT	1"	1"	44	20 x 20 x 20	-

FUEL TRANSFER PUMP

DIESEL PUMPS

PIUSI

DUTY CYCLE: CONTINUOUS

DIESEL ONLY

INLET: 2” NPT


230V/60HZ

UP TO 132 GPM

E300

INCLUDES:

- HIGH-FLOW BULK TRANSFER PUMP
- HEAVY-DUTY CAST IRON HOUSING
- INDUCTION MOTOR WITH HEAVY-DUTY ALUMINUM CASING
- NOT SELF-PRIMING



DETAIL



OPEN IMPELLER

DUTY CYCLE: CONTINUOUS

DIESEL ONLY

INLET: 2” NPT


230V/60HZ

UP TO 30 GPM

E120

INCLUDES:

- HEAVY-DUTY, HIGH-FLOW TRANSFER
- SELF-PRIMING ROTARY VANE PUMP
- INDUCTION MOTOR WITH HEAVY-DUTY ALUMINUM CASING
- DESIGNED FOR CONTINUOUS USE WITH THERMAL OVERLOAD PROTECTION & INTEGRATED BYPASS



DETAILS



VANE PUMP



FLANGED CONNECTIONS

PANTHER 56

DIESEL ONLY

INCLUDES:

- STANDARD FLOW RATE TRANSFER
- SELF-PRIMING ROTARY VANE PUMP
- INDUCTION MOTOR WITH HEAVY-DUTY ALUMINUM CASING
- DESIGNED FOR CONTINUOUS USE WITH THERMAL OVERLOAD PROTECTION & INTEGRATED BYPASS



UP TO 15 GPM

DETAILS



VANE PUMP




INTEGRATED STRAINER

PART NUMBER	DETAILS	FLOW RATE	VOLT/HZ	AMP MAX	HOSE	INLET NPT	OUTLET NPT	WEIGHT LBS	PACKAGING INCH	UL
F00321020	E300 PUMP 230V/60Hz NPT	132 GPM	230V/60Hz	9.2	-	2"	2"	61.7	20 x 20 x 20	-
F0032701	E120 - PUMP ONLY (120V/60HZ)	30 GPM	120V/60Hz	12	-	1"	1"	39	18 x 12 x 12	-
F0032608	E120 - PUMP ONLY (230V/60HZ)	30 GPM	230V/60Hz	12	-	1"	1"	39	18 x 12 x 12	-
F0073041	PANTHER 56 - PUMP ONLY (120V/60HZ)	15 GPM	120V/60Hz	7.5	-	1"	1"	20	18 x 12 x 12	-

AVIATION PUMPS

CONTINUOUS DUTY AC PUMPS

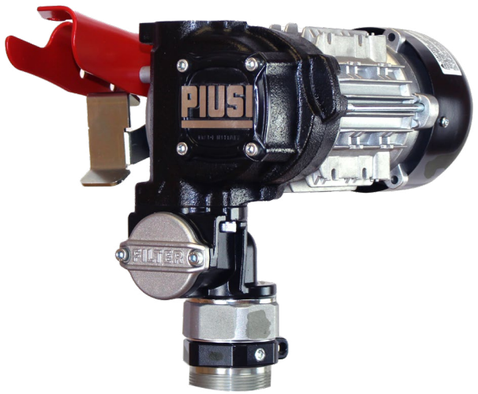

UP TO 20 GPM

c UL us LISTED MOTOR

PIUSI AVIATION MADE IN ITALY

DUTY CYCLE: CONTINUOUS

D G K FLUID TYPES

K90 +/- 0.6% ACCURACY

120V/60HZ

DRY SUCTION HEIGHT – 10 FT.
WET SUCTION HEIGHT – 18 FT.

PANTHER EX72 AVIATION NEW

INCLUDES:

- cUL/UL-LISTED FUEL TRANSFER PUMP
- NOZZLE HOLDER
- FLANGES + TANK ADAPTER

PART NUMBER	DETAILS	FLOW RATE	VOLT/HZ	AMP MAX	HOSE	INLET NPT	OUTLET NPT	WEIGHT LBS	PACKAGING INCH	UL
F00588000	PANTHER EX72 AVIATION (Pump Only)	20 GPM	120V/60Hz	7.5	-	1"	1" / 3/4"	28.5	15.7 x 9.4 x 13.7	YES



UP TO 37 GPM

c UL us LISTED MOTOR

PIUSI AVIATION MADE IN ITALY

DUTY CYCLE: CONTINUOUS

D K FLUID TYPES

K90 +/- 0.6% ACCURACY

120V/60HZ

DRY SUCTION HEIGHT – 20 FT.
WET SUCTION HEIGHT – 24 FT.

EX140 AVIATION NEW

INCLUDES:

- cUL/UL-LISTED FUEL TRANSFER PUMP
- NOZZLE HOLDER
- FLANGES + TANK ADAPTER

PART NUMBER	DETAILS	FLOW RATE	VOLT/HZ	AMP MAX	HOSE	INLET NPT	OUTLET NPT	WEIGHT LBS	PACKAGING INCH	UL
F00396900	EX140 AVIATION (Pump Only)	37 GPM	120V/60Hz	9	-	1" - 1/4"	1"	62	18 x 18 x 18	YES

AVIATION PUMP & METER

PIUSI

DUTY CYCLE: 30 ON / 30 OFF

D G K FLUID TYPES

K90 +/- 0.6% ACCURACY

12-24 VDC

DRY SUCTION HEIGHT – 16 FT.
WET SUCTION HEIGHT – 20 FT.

EX75 DC AVIATION NEW

INCLUDES:

- cUL/UL-LISTED FUEL TRANSFER PUMP
- NOZZLE HOLDER
- FLANGES + TANK ADAPTER

UP TO 20 GPM

c UL us LISTED MOTOR

PIUSI AVIATION MADE IN ITALY



PART NUMBER	DETAILS	FLOW RATE	VOLT/ HZ	AMP MAX	HOSE	INLET NPT	OUTLET NPT	WEIGHT LBS	PACKAGING INCH	UL
F00388000	EX75DC AVIATION 12V 20GPM (Pump Only)	20 GPM	12 VDC	20	-	1"	-	20	7.5 x 14 x 10	YES

INLET: 1" NPT

D G K FLUID TYPE

K150 AVIATION METER NEW

INCLUDES:

- 4-DIGIT PARTIAL (999.9), 7-DIGIT TOTAL (9999999)
- MECHANICAL FUEL METER
- 7-40 GPM
- +/- 1% ACCURACY
- 1" NPT INLET/OUTLET
- 145 PSI MAX OPERATING PRESSURE
- SUITABLE FOR LIGHT OILS UP TO 30CST
- NUTATING DISK SYSTEM



DETAILS

c UL us LISTED



NUTATING DISK SYSTEM



4 FLOW DIRECTIONS

PIUSI AVIATION MADE IN ITALY

PART NUMBER	DETAILS	FLOW RATE	FLOW DIRECTION	INLET/ OUTLET	WEIGHT LBS	PACKAGING INCH	UL
F00559000	K150 AVIATION - GALLON VERSION B	7-40 GPM		1"	5	7 x 7 x 6.5	Yes

AVIATION PRODUCTS ARE CERTIFIED INDIVIDUALLY FOR USE WITH AVIATION FUELS, AND ARE NOT SOLD AS COMPLETE KITS FOR AVIATION.
NOT ALL HOSES, NOZZLES, AND ACCESSORIES SOLD BY PIUSI ARE SUITED FOR AVIATION USE.

PITSTOP – DIESEL



UP TO 15 GPM

DUTY CYCLE: 30 ON / 30 OFF

DIESEL ONLY

FILTER: 200β/30μ

12VDC

// VERSATILE, HEAVY-DUTY REEL PUMP SYSTEM
// INSTALL ON FIXED AND MOBILE TANKS
// HIGH-FLOW DIESEL TRANSFER

PUMP

INCLUDES:

- (2) BP3000 DC PUMPS
- AUTOMATIC NOZZLE WITH SWIVEL
- 50FT HOSE REEL
- WATER FILTER
- USE FOR RURAL LOCATIONS TO FUEL FARM EQUIPMENT, FLEET, AND WORK VEHICLES

F17924000: PITSTOP SUCTION KIT

INCLUDES:

- F17192000: 2” NPT DRUM CONNECTOR W/O VALVE
- F17923000: TELESCOPIC DOWN TUBE 1” NPT 37”
- R18184000: OVAL O-RING 3156 NBR 70SH GASOLINE
- F10824020: KIT ELBOW + SCREW UNC + OR UL 157
- F1056300C: KIT FLANGE 1” NPT UL 157/UNC
- F19931000: SWIVEL M-F 1” NPT-1” NPT
- FORTIFIED SUCTION HOSE NOT PROVIDED
- SUCTION ACCESSORIES SOLD SEPARATELY

1 HOSE REEL
2 SAFETY GUARD
3 ADJUSTABLE ARM
4 DISPENSING HOSE
5 ON/OFF SWITCH
6 SWIVEL
7 A60 AUTOMATIC NOZZLE
8 STRUCTURE SUPPORT
9 WATER FILTER (Part #F0061101)

NOTE: K24 DIGITAL TURBINE METER (F0040802) – SOLD SEPARATELY

DETAILS & ACCESSORIES


BUILT-IN DUAL PUMPS



FILTER


A60 NOZZLE W/SWIVEL


PADLOCK


ADJUSTABLE ARM

PART NUMBER	DETAILS	FLOW RATE	VOLT/HZ	AMP MAX	HOSE	INLET NPT	NOZZLE	WEIGHT LBS	PACKAGING INCH	UL
F0021202	PITSTOP	15 GPM	12 DC	33	50 FT	1"	A60	99	24 x 14 x 25	-

MOBILE UNITS – DIESEL

DUTY CYCLE: 30 ON / 30 OFF

SELF PRIMING: 6.5 FT

DIESEL ONLY

12-24VDC



UP TO 12 GPM

PIUSIBOX

A self-contained, ultra-portable diesel refueling kit in a protective carrying case, ideal for everyday fueling or emergency fuel recovery. It includes a DC Bypass 3000 pump, delivery and suction hoses, manual nozzle, particulate filter, and the PIUSI Vantage Valve for spill prevention.


BP 3000 PUMP


FILTER AVAILABLE


MANUAL NOZZLE


FILTER STRAINER


6’ SUCTION HOSE



UP TO 12 GPM

BATTERY KIT

A handheld, portable diesel transfer pump designed to be used as a mobile refueling solution for on-the-go dispensing. This kit includes a 12V Bypass 3000 pump, manual nozzle, suction and dispensing hoses, and the PIUSI Vantage Valve for spill prevention.


HANDLE


ELECTRIC CABLE


ON/OFF SWITCH


MANUAL NOZZLE


FILTER STRAINER


13’ DELIVERY HOSE


6’ SUCTON HOSE



UP TO 13 GPM

BP3000/CARRY3000

The top-selling worldwide DC pump—a tried-and-true solution for light-duty diesel transfer. Long revered for its reliability, it is incorporated into several PIUSI dispensing systems and is also available as a portable, handheld unit: the CARRY3000.


ELECTRIC CABLE


HANDLE

PART NUMBER	DETAILS	FLOW RATE	AMP MAX	DELIVERY HOSE	SUCTION HOSE	WEIGHT	PACKAGING INCH	UL
F0023101	PIUSIBOX (12V)	12 GPM	22	13 FT	6.5 FT	28	16 x 16 x 21	-
F0023201	PIUSIBOX (24V)	12 GPM	12	13 FT	6.5 FT	28	16 x 16 x 21	-
F0022500	BATTERY KIT (12V)	12 GPM	22	13 FT	-	19	12 x 12 x 12	-
F0022600	BATTERY KIT (24V)	12 GPM	13	13 FT	-	19	12 x 12 x 12	-
F0022300	CARRY3000 (12V)	12 GPM	22	-	-	9.3	10.2 x 9.3 x 6.5	-
F0022400	CARRY3000 (24V)	12 GPM	13	-	-	9.3	10.2 x 9.3 x 6.5	-
F00342000	BP3000 (12V)	12 GPM	22	-	-	9.1	10.2 x 9.3 x 6.5	-

HANDMAX

ROTARY HAND PUMP

Built for durability and designed for precision, this heavy-duty hand pump delivers reliable fuel transfer wherever power isn't available. Featuring a built-in counter, it allows operators to track dispensed fuel while maintaining complete control over every transfer.

Constructed from aluminum and stainless steel, the pump is engineered to withstand demanding environments and provide years of dependable performance.



UP TO 10.5 GPM

C UL US LISTED MOTOR

1 BUILT-IN COUNTER
2 ANTI-THEFT LEVER
3 VANE PUMP WITH REDUCER

HAND PUMP: Ø 1" SPOUT

HOSE LENGTH: 50 FT

D B G K FLUID TYPES

PIUSI HANDMAX NEW
DETAILS AND ACCESSORIES



2" NPT DRUM CONNECTOR | SUCTION PIPE | NON-SLIP HANDLE | STAINLESS STEEL



PART NUMBER	DETAILS	FLOW RATE	INLET NPT	OUTLET NPT	BUNG MOUNT	WEIGHT LBS	PACKAGING INCH	UL
F0033350P2600	PIUSI HANDMAX ONLY PUMP GALLONS	10.5 GPM	1"	1"	21"	7.5	12 x 12 x 7	YES
F0033351P2600	PIUSI HANDMAX ONLY PUMP LITERS	10.5 GPM	1"	1"	21"	7.5	12 x 12 x 7	YES
F0033360P2600	PIUSI HANDMAX PUMP GAL + HOSE + SPOUT	10.5 GPM	1"	1"	21"	7.5	12 x 12 x 7	YES
F0033361P2600	PIUSI HANDMAX PUMP LT + HOSE + SPOUT	10.5 GPM	1"	1"	21"	7.5	12 x 12 x 7	YES

HAND PUMP: Ø 2" SPOUT

HOSE LENGTH: 50 FT

D O FLUID TYPES

PIUSI HAND PUMP
DETAILS AND ACCESSORIES



2" NPT DRUM CONNECTOR | SUCTION PIPE | NON-SLIP HANDLE | STAINLESS STEEL

UP TO 10.5 GPM





PART NUMBER	DETAILS	FLOW RATE	INLET NPT	SPOUT EXT	WEIGHT LBS	PACKAGING INCH	UL
F0033253	PIUSI HAND PUMP WITH HOSE	10.5 GPM	2"	2"	7	12 x 12 x 7	-
F0033251	PIUSI HAND PUMP WITHOUT HOSE	10.5 GPM	2"	2"	4.6	15 x 7 x 6	-

FLUID TYPES: (D) DIESEL (B) BIODIESEL (G) GASOLINE (O) OIL (K) KEROSENE

AUTO FUEL NOZZLES

A60-UL / A120-UL / A140-UL



LISTED MOTOR

A60-UL: Ø 3/4” SPOUT
A120-UL: Ø 1” SPOUT
A140-UL: Ø 1” SPOUT

FLUID TYPES

A60-UL / A120-UL / A140-UL
DETAILS AND ACCESSORIES



F 1” NPT INLET



F 3/4” NPT INLET



AUTOMATIC STOP

PART NUMBER	DETAILS	FLOW RATE	INLET NPT	SPOUT EXT	WEIGHT LBS	PACKAGING INCH	UL
F18635000	A60-UL AUTO NOZZLE	16 GPM	3/4"	3/4"	2.76	14 x 14 x 11	Yes
F21088000	A120-UL AUTO NOZZLE	32 GPM	1"	1"	4.25	14 x 14 x 11	Yes
F22435000	A140-UL AUTO NOZZLE	37 GPM	1"	1"	4.25	14 x 14 x 11	Yes

A60 AUTO / A120 AUTO



A60: Ø 3/4” SPOUT
A120: Ø 1” SPOUT

DIESEL ONLY

A60 AUTO / A120 AUTO
DETAILS AND ACCESSORIES



1” SPOUT 1” INLET



3/4” SPOUT 1” INLET



1” NPT-F SWIVEL



AUTOMATIC STOP

PART NUMBER	DETAILS	FLOW RATE	INLET NPT	SPOUT EXT	WEIGHT LBS	PACKAGING INCH	UL
F00603470	A60 AUTO FUEL NOZZLE	19 GPM	1"	3/4"	2.65	14 x 14 x 11	-
F00610160	A120 AUTO FUEL NOZZLE	32 GPM	1"	1"	4.25	14 x 14 x 11	-

MANUAL FUEL NOZZLES

SELF 2000 1”: Ø 1” SPOUT
SELF 2000 3/4”: Ø 3/4” SPOUT

FLUID TYPES

SELF 2000 1” / SELF 2000 3/4”
DETAILS AND ACCESSORIES



ALUMINUM ALLOY BODY



INTEGRAL HOOK

SELF 2000 1” / SELF 2000 3/4”



PART NUMBER	DETAILS	FLOW RATE	INLET NPT	SPOUT EXT	WEIGHT LBS	PACKAGING INCH	UL
F00647500	MANUAL NOZZLE SELF 2000 1"	30 GPM	1"	1"	1.5	-	-
F00648500	MANUAL NOZZLE SELF 2000 3/4"	30 GPM	3/4"	3/4"	1.5	-	-





INLET: 1” NPT

D G K FLUID TYPE

K90

C UL US LISTED

INCLUDES:

- 3-DIGIT PARTIAL (99.9), 7-DIGIT TOTAL (9999999)
- MECHANICAL FUEL METER
- UL + IECEX APPROVAL
- 5 TO 24 GPM
- +/- 0.6% ACCURACY
- 1” NPT INLET/OUTLET
- 145 PSI MAX OPERATING PRESSURE
- NUTATING DISK SYSTEM

DETAILS



NUTATING DISK SYSTEM



2 FLOW DIRECTIONS

FLOW DIRECTION:

AVAILABLE WITH DIFFERENT OUTLET UPON REQUEST.

PART NUMBER	DETAILS	FLOW RATE	FLOW DIRECTION	INLET/ OUTLET	WEIGHT LBS	PACKAGING INCH	UL
F009SE500	K90 UL - GALLON VERSION SE	5-32 GPM		1"	5	7 x 7 x 6.5	Yes
F009SE600	K90 UL - LITER VERSION SE	5-32 GPM		1"	5	7 x 7 x 6.5	Yes
F009SW500	K90 - GALLON VERSION SW	5-32 GPM		1"	5	7 x 7 x 6.5	Yes
F009SW600	K90 - LITER VERSION SW	5-32 GPM		1”	5	7 x 7 x 6.5	Yes

MECHANICAL
FLOW METERS

PIUSI

INLET: 1” NPT

D G K FLUID TYPE

K150

C UL US LISTED

INCLUDES:

- 4-DIGIT PARTIAL (999.9), 7-DIGIT TOTAL (9999999)
- MECHANICAL FUEL METER
- 7 TO 40 GPM
- +/- 1% ACCURACY
- 1” NPT INLET/OUTLET
- 145 PSI MAX OPERATING PRESSURE
- SUITABLE FOR LIGHT OILS UP TO 30CST
- NUTATING DISK SYSTEM



DETAILS



NUTATING DISK SYSTEM



4 FLOW DIRECTIONS

INLET: 1 1/2” NPT

D DIESEL ONLY

K700M

INCLUDES:

- 4-DIGIT PARTIAL (999.9), 7-DIGIT TOTAL (9999999)
- MECHANICAL FUEL METER
- 4-DIGIT HIGH FLOW METER
- 5 TO 53 GPM
- +/- 1.5% ACCURACY
- 1-1/2” NPT INLET/OUTLET
- 145 MAX OPERATING PRESSURE
- SUITABLE FOR LIGHT OILS UP TO 200CST
- OVAL GEAR SYSTEM



DETAILS



OVAL GEAR



4 FLOW DIRECTIONS

PART NUMBER	DETAILS	FLOW RATE	FLOW DIRECTION	INLET/ OUTLET	WEIGHT LBS	PACKAGING INCH	UL
F00556B0	K150 - GALLON VERSION B	7-40 GPM		1"	5	7 x 7 x 6.5	Yes
F00556B1	K150 - LITER VERSION B	7-40 GPM		1"	5	7 x 7 x 6.5	Yes
F00540050	K700M MECHANICAL METER - GALLON VERSION A	5-53 GPM		1-1/2"	12.8	10 x 10 x 11	-
F00540080	K700M MECHANICAL METER - GALLON VERSION D	5-53 GPM		1-1/2"	12.8	10 x 10 x 11	-
F00540100	K700M MECHANICAL METER - LITER VERSION A	5-53 GPM		1-1/2"	12.8	10 x 10 x 11	-

DIGITAL FLOW METERS

These digital turbine meters take the trusted K24 meter line to the next level. Now engineered for multiple fuels, they retain the proven inline turbine and 360° rotatable face you rely on—while upgrading to a rugged aluminum housing. Compatible with diesel, gasoline (up to E85), kerosene, Avgas, 100/100LL, Jet A/A1, and Aspen 2/4, they're built for versatility across demanding fuel applications.

INLET: 1" NPT

D G K FLUID TYPE

K24

INCLUDES:

- BIDIRECTIONAL FLOW MEASURES ACCURATELY FROM ANY ANGLE
- FEMALE/MALE INLET & OUTLET FOR QUICK INSTALLATION IN COMMON SYSTEM CONFIGURATIONS
- ADJUSTABLE DIGITAL DISPLAY FOR EASY VIEWING
- NOZZLE-MOUNTED OR IN-LINE INSTALLATION OPTIONS
- PROTECTIVE RUBBER CASING & SEALED INTERNALS FOR USE IN DIVERSE ENVIRONMENTS

K24-UL

c UL us LISTED





K24-A





K24 PULSER



K24 CONDUIT PULSER



c UL us LISTED

DETAILS



ROTATABLE DISPLAY



BI-DIRECTIONAL



TURBINE PULSER

PART NUMBER	DETAILS	FLOW RATE	INSTANT FLOW RATE	ACCURACY	CALIBRATION	BATTERY	WEIGHT LBS	PACKAGING INCH	UL
F00408U0	K24-UL	2-32 GPM	Yes	+/- 1%	Yes	R18021000	1.1	6 x 6 x 6	Yes
F0040802	K24-A	2-32 GPM	Yes	+/- 1%	Yes	2 X AAA	1.1	6 x 6 x 6	-
F00408Z1	K24 PULSER	2-32 GPM	-	+/- 1%	Yes	-	1.1	6 x 6 x 6	Yes
F00408Z2	K24 CONDUIT PULSER	2-32 GPM	-	+/- 1%	Yes	-	1.1	6 x 6 x 6	Yes

DIGITAL FLOW & PULSE METERS

PIUSI

ACCURACY: +/- 0.5%

D FLUID TYPE

K600/3

- DIGITAL METER
- PULSE METER





DETAIL



OVAL GEAR

PART NUMBER	DETAILS	FLOW RATE	ACCURACY	PULSE RATIO	OPERATING PRESSURE (PSI)	BURST PRESSURE (PSI)	INLET/ OUTLET	WEIGHT LBS	PACKAGING INCH	UL
F00496A4	K600/3 METER	2.6-26 GPM	+/- 0.5%	-	30	426	1" / 1"	3	7.9 x 4.7 x 5.5	-
F00472A3	K600/3 PULSER	2.6-26 GPM	+/- 0.5%	132.1	30	426	1" / 1"	3	10 x 10 x 10	-

K600 B/3

- DIGITAL METER
- DIGITAL METER WITH PULSE OUT





DETAILS



OVAL GEAR



ROTATING DISPLAY

PART NUMBER	DETAILS	FLOW RATE	ACCURACY	PULSE RATIO	OPERATING PRESSURE (PSI)	BURST PRESSURE (PSI)	INLET/ OUTLET	WEIGHT LBS	PACKAGING INCH	UL
F00492020	K600 B/3 1" NPT PULS OUT	2.6-26 GPM	+/- 0.5%	1:1, 2:1, 5:1, 10:1, 20:1, 50:1, 100:1	30	426	1"	4.4	7.9 x 4.7 x 5.5	-
F0049202	K600 B/3 PULSER	2.6-26 GPM	+/- 0.5%	132:1	30	426	1"	4.4	4.5 x 6.3 x 5.3	-

K600/4

- DIGITAL METER
- PULSE METER





DETAIL



OVAL GEAR

PART NUMBER	DETAILS	FLOW RATE	ACCURACY	PULSE RATIO	OPERATING PRESSURE (PSI)	BURST PRESSURE (PSI)	INLET/ OUTLET	WEIGHT LBS	PACKAGING INCH	UL
F0049701A	K600/4 METER	3.9-39 GPM	+/- 0.5%	-	20	290	1-1/2"	7	7.9 x 4.7 x 5.5	-
000473010	K600/4 PULSER	3.9-39 GPM	+/- 0.5%	98:1	20	290	1-1/2"	7	7.9 x 4.7 x 5.5	-

DIGITAL FLOW & PULSE METERS

ACCURACY: +/- .5% | FLUID TYPE

K700
PULSE METER



DETAILS



OVAL GEAR



BUILT-IN FILTER

PART NUMBER	DETAILS	FLOW RATE	ACCURACY	PULSE RATIO	OPERATING PRESSURE (PSI)	BURST PRESSURE (PSI)	INLET/ OUTLET	WEIGHT LBS	PACKAGING INCH	UL
F0049801A	K700 PULSER	6.6-66 GPM	+/- 0.5%	53:1	20	290	2"	12	11 x 6.3 x 5.5	-

K900
DIGITAL METER & PULSER



DETAILS



OVAL GEAR



BUILT-IN FILTER

PART NUMBER	DETAILS	FLOW RATE	ACCURACY	PULSE RATIO	OPERATING PRESSURE (PSI)	BURST PRESSURE (PSI)	INLET/ OUTLET	WEIGHT LBS	PACKAGING INCH	UL
F0049903	K900 METER	13-132 GPM	+/- 0.5%	-	20	290	3"	31	16 x 12 x 12	-
F0049904	K900 PULSER	13-132 GPM	+/- 0.5%	10:1	20	290	3"	26.5	15.7 x 114 x 7.9	-

ACCURACY: +/- .5% | FLUID TYPE

REMOTE DISPLAY
PULSE-OUT RATIO:
1:1, 5:1, 10:1, 100:1



DETAILS



ADJUST BRACKET



5-DIGIT PARTIAL

PART NUMBER	DETAILS	FLOW RATE	ACCURACY	PULSE RATIO	OPERATING PRESSURE (PSI)	BURST PRESSURE (PSI)	INLET/ OUTLET	WEIGHT LBS	PACKAGING INCH	UL
F0049503B	REMOTE DISPLAY PULSE-OUT 100:1	-	-	1:1, 5:1, 10:1, 100:1	-	-	PULSE OUT	2.6	8.9 x 4.9 x 5.9	-

FILTRATION

FILTERS

	FILTER HEAD 1" NPT 1-1/2" NPT	HYDRO FILTER 3-3/4" x 8-3/8"	HYDRO FILTER 3-3/4" x 5-3/8"	PARTICULATE FILTER 3-3/4" x 8-3/8"	PARTICULATE FILTER 3-3/4" x 5-3/8"	CARTRIDGE 10 MICRON FILTER 3/4in
		D G FLUID	D G FLUID	D G FLUID	D G FLUID	D FLUID
		200□/30µ	200□/30µ	200□/10µ	200□/10µ	200□/10µ













PART NUMBER	DETAILS	GPM	PSI	A (IN)	B (IN)	C (IN)	INLET/ OUTLET	WEIGHT LBS	PACKAGING INCH
F1464001	FILTER HEAD 1" NPT	-	-	-	-	-	1" NPT	1	-
F1464002	FILTER HEAD 1-1/2" NPT	-	-	-	-	-	1-1/2" NPT	1	-
F00611T6	HYDRO FILTER 3-3/4" X 8-3/8"	25	50	8-5/8"	3-14"	1" - 12 UNF	-	2	9 x 11.5 x 3.5
F00611T5	HYDRO FILTER 3-3/4" X 5-3/8"	25	50	5-3/8"	3-14"	1" - 12 UNF	-	1	6 x 8.5 x 3.5
F00611T1	PARTICULATE FILTER 3-3/4" X 8-3/8"	25	50	8-5/8"	3-14"	1" - 12 UNF	-	2	9 x 11.5 x 3.5
F00611T0	PARTICULATE FILTER 3-3/4" X 5-3/8"	25	50	5-3/8"	3-14"	1" - 12 UNF	-	1	6 x 8.5 x 3.5
F0061100	CARTRIDGE 10 MICRON FILTER 3/4"	15	174	5"	3-14"	1" - 12 UNF	-	1	6 x 8.5 x 3.5

WATER CAPTOR

200□/30µ

DETAIL



FILTER HEAD



CLEAR CAPTOR

FILTERING CAPACITY: 2□/5µ



DETAILS



STRAINER CARTRIDGE 1" BSP



IMPURITIES CARTRIDGE 1" BSP



WATER CARTRIDGE 1" BSP



DRAIN VALVE

PART NUMBER	DETAILS	GPM	PSI	A (IN)	B (IN)	C (IN)	INLET/ OUTLET	WEIGHT LBS	PACKAGING INCH
F0061102	WATER CAPTOR	UP TO 40	UP TO 50	10.8	4.7	-	1" - 12 UNF	2	5.4 x 8 x 3.3
F0061103	CLEAR CAPTOR	UP TO 40	UP TO 50	4.4	3	-	1" NPT	1.9	7.5 x 7.5 x 9.4




B.SMART

B.SMART MC BOX WITH B.SMART APP & CLOUD SOFTWARE

The B.SMART MC BOX is a Bluetooth-enabled, cloud-based fuel management system that delivers a simple, scalable, and cost-effective solution for fleets of any size. Supporting a robust two-hose platform, it pairs with the B.SMART App to allow drivers to authorize fueling and automatically transfer transaction data to the cloud using their smartphones. For fleets that prefer alternative authentication methods, optional keypad entry or i-button access is also available. Easy to install and designed for single or multi-site operations, B.SMART streamlines fuel management with an innovative, user-friendly approach.

B.SMART MC BOX WITH B.SMART APP & CLOUD SOFTWARE

- SIMPLE: ONLY NEED A SMARTPHONE AND BLUETOOTH
- CLOUD-BASED: NO LOCAL NETWORK REQUIRED
- APP-BASED: AN INTUITIVE AND SIMPLE APP
- EXPANDABLE: SOFTWARE FITS ANY FLEET SIZE
- MULTI-CUSTOMER/MULTI-SITE MANAGEMENT
- TWO-HOSE FMS
- REMOTE ACCESS APP-BASED WITH NO FEES: NO RENTAL OR RECURRING FEES
- KEYPAD IN CASE OF NO SMART-DEVICE AVAILABILITY

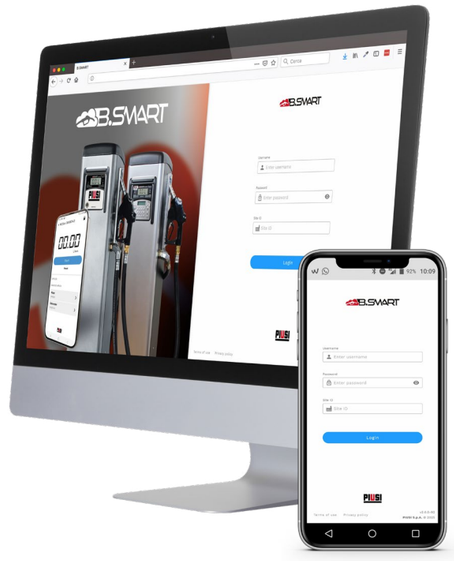


SLIDING DOOR


B.SMART MOBILE APP

B.SMART REQUIRED


EASY ACCESS TO CONNECT


ETL LISTED

PART NUMBER	DETAILS	VOLT/HZ	VOLTAGE POWER WATT	AMP MAX	WEIGHT LBS	PACKAGING INCH
F00599500	MC BOX B.SMART 2P CETL KEYPAD 50 ACCESS	"100V-240V 50/60Hz"	5 W	15	11.5	11.8 x 11.8 x 7.1
F00700D20	DRIVER ACCESS ADD-ON B.SMART (X50)	-	-	-	-	-

FUEL MANAGEMENT SYSTEMS

PIUSI



CUBE 70 B.SMART

120V/60HZ

FLUID TYPE

ACCURACY: +/- 0.5%


PANTHER PUMP


AUTOMATIC NOZZLE


K600/3 METER

B.SMART REQUIRED

PART NUMBER	DETAILS	FLOW RATE	GPM	AMP MAX	ACCURACY	SOFTWARE REQUIRED	WEIGHT LBS	PACKAGING INCH	UL
F00598500	CUBE 70 B.SMART 120 V - 50 DRIVERS	15 GPM	UP TO 15	5 A	+/- 0.5%	B.SMART	53.5	15 x 15 x 15.7	-



SELF SERVICE B.SMART

UNLIMITED FLEET SIZE

FLUID TYPE


E120 PUMP



AUTOMATIC NOZZLE



K600/3 PULSER


WATER CAPTOR FILTER

B.SMART REQUIRED

PART NUMBER	DETAILS	FLOW RATE	GPM	AMP MAX	ACCURACY	SOFT-WARE REQUIRED	WEIGHT LBS	PACKAGING INCH	UL
F00748500	SS 100 120/60 B.SMART KEYPAD NPT 50 ACC	20 GPM	UP TO 30	10 A	+/- 0.5%	B.SMART	136	19.3 x 58.3 x 15.7	-

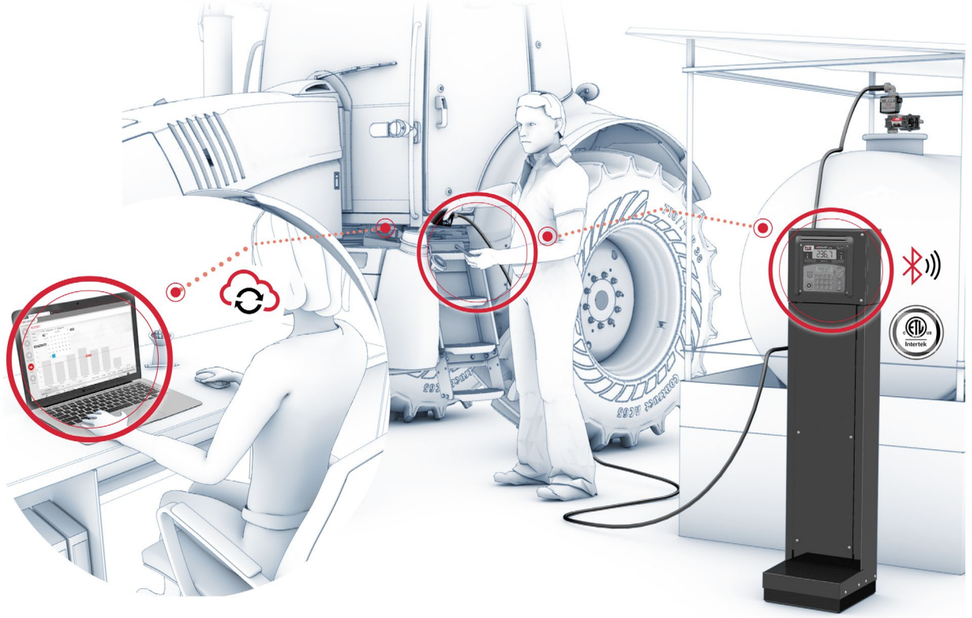

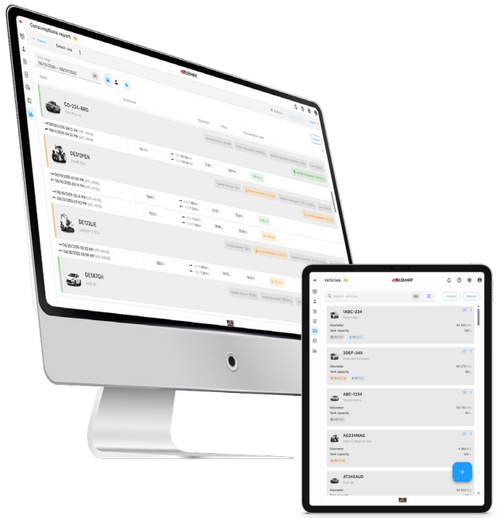


FUEL ECONOMY ADD-ON

The Fuel Economy Add-On for B.SMART helps improve fleet profitability by adding advanced fuel monitoring and reporting capabilities. Using vehicle QR codes for fast, accurate identification, it streamlines refueling, reduces manual errors, and provides cleaner data for more efficient fleet management.

- SET DRIVER AND VEHICLE LIMITS BY QUANTITY OR TIME
- MONITOR CONSUMPTION AND CROSS-CHECK DRIVERS AND VEHICLES
- MANAGE OFF-SITE REFUELING AND SERVICE STATION TRANSACTIONS
- ADD/CUSTOMIZE FLEET VEHICLES IN THE B.SMART APP
- GROUP VEHICLES USING CUSTOMIZABLE SETTINGS
- UPLOAD VEHICLE AND DRIVER IMAGES FOR QUICK ID
- IDENTIFY HIGH FUEL CONSUMPTION DRIVERS
- FILTER DATA BY VEHICLE, FUEL TYPE, AND DRIVER TRENDS

PART NUMBER	DETAILS
F00770F20	B.SMART FUEL ECONOMY ADD-ON ONE-TIME FEE
F17299Q00	B.SMART FUEL ECONOMY 45 QR CODES

PIUSI

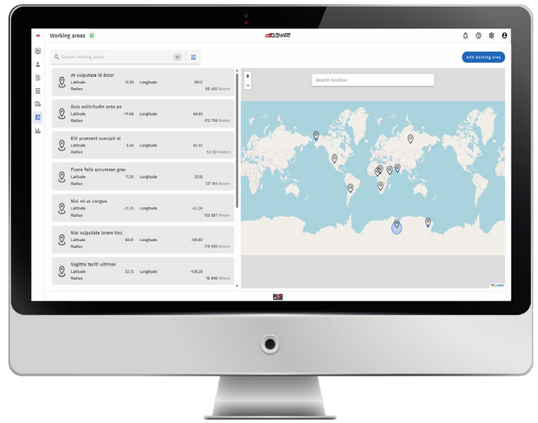

MAPLY ADD-ON

Benefit from geolocation tracking and access control to map fuel transactions, manage fuel transfers between fixed and mobile tanks, and monitor third-party vehicle refueling.

- SEE FULL MAP VIEW OF ALL FUEL DISPENSING (QUANTITY, DATE, TIME, VEHICLE, ETC.)
- RESTRICT THE DISPENSER'S AREA OF USE THROUGH GEOFENCING
- GROUP FUELING DISPENSES INTO DEFINED AREAS (WORKING AREAS)

PART NUMBER	DETAILS
F00770M20	B.SMART MAPLY ADD-ON - ONE-TIME FEE

TANK WATCHDOG ADD-ON

B.SMART Tank Watchdog is the perfect add-on for complete and instant control of your fuel supply.


- MONITOR THE TANK LEVEL (ADD FLUID LOADS, TRACK USAGE, AND APPLY ADJUSTMENTS)
- MANAGE FLUID SUPPLIERS TO KEEP TRACK OF DAILY PRICING & PURCHASED VOLUMES
- FOLLOW INVENTORY PRICE VALUES AND TRENDS
- DEFINE THE REFUELING PRICE AND VERIFY THE CURRENT INVENTORY VALUE
- GET REMOTE DATA OF YOUR INVENTORY VALUE

ADD THE OCIO LEVEL INDICATOR TO MONITOR TANK LEVELS IN REAL TIME, RECEIVE LOW-LEVEL AND FAULT ALERTS, AND CONNECT COMPATIBLE TANK GAUGES—OR USE THE BUILT-IN VIRTUAL TANK OPTION.

PART NUMBER	DETAILS
F00770L20	B.SMART TANK WATCHDOG ADD-ON ONE-TIME FEE
F00770K60	KIT TANK WATCHDOG+FEM+MAPLY - ONE-TIME FEE

*CLOUD WEB APP SOFTWARE UPDATES ARE ONLY AVAILABLE ONCE A B.SMART DRIVER SENDS TANK LEVEL DATA TO THE CLOUD VIA SMART PHONE APP AFTER CONNECTED TO AN INTERNET SOURCE.



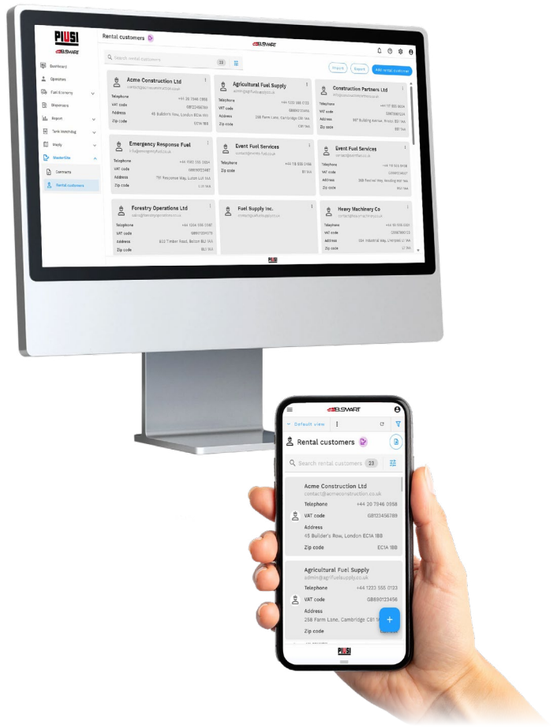

THE MASTERSITE ADVANTAGE:
A NEW STANDARD IN TANK RENTAL

B.SMART MasterSite automates tank rental and fuel distribution to maximize asset profitability, reduce downtime, and improve operational control.

WHY CHOOSE MASTERSITE?

- MAXIMUM CUSTOMIZATION:
  FULLY CONFIGURABLE VIRTUAL SITES TAILORED TO EACH CUSTOMER'S SPECIFIC NEEDS
- ON-DEMAND MODULAR SERVICES:
  ADD-ONS ACTIVATED INSTANTLY AND ALIGNED WITH RENTAL CONTRACT REQUIREMENTS
- DEDICATED & SECURE ENVIRONMENTS:
  INDEPENDENT WORKSPACES WITH COMPLETE DATA AND CONFIGURATION SEPARATION
- TOTAL CONTROL, ANYTIME:
  INTEGRATED MONITORING WITH TANK WATCHDOG FOR ADVANCED OVERSIGHT AND SECURITY
- SEAMLESS OPERATIONS:
  FAST CONTROL UNIT RESET TO MINIMIZE DOWNTIME BETWEEN RENTALS

PART NUMBER	DETAILS
5007700J00	B.SMART MASTERSITE (10TANKS) ADD-ON ONE-TIME FEE
F007700J10	B.SMART MASTERSITE (50TANKS) ADD-ON ONE-TIME FEE

MAX TUBE LENGTH: 164'
DIESEL ONLY
UP TO 30 cSt
± 1% ACCURACY

OCIO
DETAILS AND ACCESSORIES

BRASS PROBE | TWO ALARMS | OIL KIT F12839000

OCIO




MAX TUBE LENGTH: 164'
± 1% ACCURACY
UP TO 30 cSt
A D D O W W FLUID TYPES

OCIO LINK
DETAILS AND ACCESSORIES

DEDICATED DESKTOP & MOBILE APP | CUSTOM NOTIFICATION

OCIO LINK

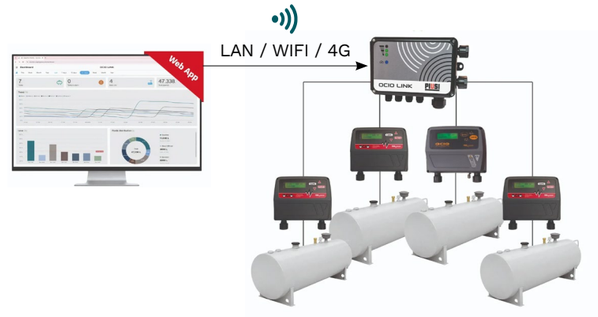

PART NUMBER	DETAILS	MAX TANK HEIGHT (FT)	WEIGHT (LB)	PACKAGING (N)
F0075511	OCIO	13	4.8	11.8 x 16.1 x 3.9
F00755L00	OCIO LINK 120/240V 50/60Hz (COMPATIBLE WITH B.SMART)	13	1.5	11 x 6.2 x 5.5

FLUID TYPES:
(A) ANTI-FREEZE (D) DEF (D) DIESEL (O) OIL (W) WATER (W) WINDSHIELD WASHER FLUID

CABINET DISPENSERS

± 1% ACCURACY

AC/DC VOLTAGE

DIESEL ONLY

CUBE 56

INCLUDES:

- 15 GPM PANTHER 56 DIESEL TRANSFER PUMP
- 3-DIGIT MECHANICAL METER
- 13FT DISPENSE HOSE
- AUTOMATIC A60 NOZZLE



Supply fuel to vehicles with the CUBE 56 three-digit mechanical dispenser designed for private use. This fully enclosed, electric fuel transfer unit comes equipped with an integrated meter, hose, and automatic nozzle—allowing for fast, safe refueling and accurate fuel measurement every time.

UP TO
15
GPM





PART NUMBER	DETAILS	FLOW RATE	VOLT/HZ	AMP MAX	WEIGHT LBS	PACKAGING INCH	UL
F0057900	CUBE 56 WITH SUCTION PUMP (120V)	15 GPM	120V/60Hz	15	48.5	15 x 15 x 19	-
F0057603	CUBE 56 WITH SUCTION PUMP (12V)	15 GPM	12V	-	48.5	15 x 15 x 19	-

± 1% ACCURACY

120V/60HZ

DIESEL ONLY

SELF SERVICE K44

WITH & WITHOUT SUCTION PUMP

INCLUDES:

- 30 GPM E120 DIESEL TRANSFER PUMP (WITH SUCTION PUMP)
- 4-DIGIT MECHANICAL METER
- 13FT DISPENSE HOSE
- AUTOMATIC A120 NOZZLE
- COMPATIBLE WITH ANY AC PUMP (WITHOUT SUCTION PUMP)

THIS PRODUCT HAS THE EUROPEAN CE CERTIFICATION AND DOES NOT HAVE A NATIONALLY RECOGNIZED TESTING LABORATORY (NRTL) MARKING. IT IS FOR AGRICULTURAL DIESEL APPLICATIONS ONLY.

Transfer diesel faster with the SELF SERVICE K44 dispenser. It features an easy-to-read 4-digit mechanical meter, a high-flow E120 diesel pump, a 13-ft dispensing hose, and an automatic nozzle. The integrated nozzle switch controls the pump on/off function. Just return the nozzle to the holster, and the pump automatically shuts off.

UP TO
30
GPM





PART NUMBER	DETAILS	FLOW RATE	VOLT/HZ	AMP MAX	WEIGHT LBS	PACKAGING INCH	UL
F0074009	SELF SERVICE K44 WITH PUMP (GALLON)	30 GPM	120V/60Hz	10	175	59 x 32 x 28	-
F0074010	SELF SERVICE K44 W/O PUMP	30 GPM	120V/60Hz	10	165	58 x 19 x 16	-

ACCESSORIES

FUEL ACCESSORIES

PART NUMBER	DESCRIPTION
F23285000	REDUCER 1"NPT-M X 3/4"NPT-F
F07889000	FITTING F 1" BSP / M 3/4" BSP
F19931000	SWIVEL M-F 1"NPT-1"NPT
F19473000	DRUM CONNECTOR 2"NPT FOR HAND PUMP



F17923000	TELESCOPIC DOWN TUBE 1"NPT 37"
F18156000	(EX) ADAPTER FOR CONDUIT ATEX EX50 - (METRIC ADAPTER)
F18624000	(EX) CABLE GLAND EXD1/2NPT ATEX/IECEX (CABLE GLAND)
F18626000	(EX)CABLE+CABLEGLAND ATEX/IECEX EX50 12V
F22436000	ANTISIPHON KIT FOR EX80/100/140
F1862800A	FUEL HOSE 3/4"ID X 13'1"NPT X 3/4"NPT + ANTI-KINK (EX50)
F2044100A	FUEL HOSE 1"ID X 13' 1"NPT X 1"NPT + ANTI-KINK (EX75)
F2201800A	FUEL HOSE 1"ID X 20' 1"NPT X 1"NPT + ANTI-KINK (EX75)
F21533000	FUEL HOSE 3/4"ID X 20' 1"NPT X 3/4"NPT + ANTI-KINK (EX50)
F16722000	FUEL HOSE 3/4"ID X 50' 3/4"BSP X 3/4"BSP-M (PITSTOP)




F21771000	CENTER-BALANCED MOUNT (2"NPT - EX PUMPS)
F17191000	2" NPT DRUM CONNECTOR WITH VALVE
F17192000	2" NPT DRUM CONNECTOR W/O VALVE
R15922000	1-1/2"NPT/GAL K700M FLANGE KIT
R11507000	KIT FLANGE K900 3IN NPTF
F27132000	PEX CAST IRON BUNG ADAPTOR (FEMALE)



F18653000	KIT FLANGE EX50 NPT/UNC (NR.2 PZ)
F1057000A	KIT FLANGE 3/4"NPT-F
F1056300A	KIT FLANGE 1"NPT-F
F1082400A	KIT FLANGED + ELBOW + OR + SCREW FOR EX KITS
R10824000	EX 1" FLANGED ELBOW KIT (W/ O-RING + SCREW)
R11276000	KIT NR. 5 BLADES + NR. 5 SPRING PANTHER 56 - VANE KIT
R11287000	KIT N.10 BLADES 13.72X5.8X25 VANE KIT FOR BIPUMP
F09779010	KIT FLANGE K150/K33 WITH PUMP/UL157/UNC
F18802000	KIT CONNECTION PUMP EX50 - K33



F20666000	18FT 12V POWER CABLE - KIT CABLE 5.5 MT EX50
R18092000	MECHANICAL SEAL KIT EX50 (5 PCS)
R18700000	EX50 VANE KIT
R18795000	KIT COVER CHAMBER EX50
R18801000	KIT GASKETS/O-RINGS PUMP EX
R20299000	COVER EX50 WITH NOZZLE HOLDER

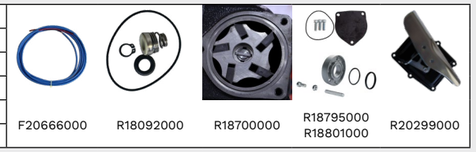

R21393000	PUMP CHAMBER COVER (UL-FOR EX80/100/140)
R21411000	BYPASS VALVE (FOR EX100/EX140)
R21429000	SHAFT SEAL (FOR EX80/100/140)
R21549000	ROTOR WITH VANES (FOR EX80/EX100)
R21549010	ROTOR WITH VANES (FOR EX140)
R21633000	CAPACITOR 80 MICROF (UL-FOR EX80/EX100/EX140 PUMPS)
R21668000	FAN COVER (FOR EX100/EX140)
R21707000	O-RING (EX80/110/140 SWITCH HOUSING)
R22424000	VANES (FOR EX140)
R22495000	VANES (FOR EX80/EX100)
R21591000	SWITCH EX80-EX100-EX140



R19389000	SUCTION PIPE (FOR ROTARY HAND PUMP)
F19473000	DRUM CONNECTOR 2" NPT FOR HAND PUMP



PIUSI.COM/USA



PIUSI USA, Inc.
3901 Anglers Avenue
Fort Lauderdale, FL 33312
tel. 954-584-1552
fax. 954-584-1554
e-mail: sales.usa@piusi.com



PIUSI S.p.A.
Headquarters
46029 Suzzara (Mantova) Italy
tel. +39 0376 534561
e-mail: piusi@piusi.com

The intellectual property of this catalog is assigned to all countries. Translation, reproduction, electronic storage, and full or partial adaptation by any means (including photo copies or digital reproduction) of its contents, without prior written authorization from PIUSI S.p.A., entails a violation of PIUSI S.p.A.'s copyrights and constitutes an act of unfair competition. The products shown in the images of this catalog are protected according to the regulation in force regarding industrial property.

The information contained in this catalog is as accurate as possible and complies, as far as possible, with existing regulations at the time of its publication. We therefore reserve the right to make subsequent changes in line with modifications to regulations and/or in relation to any production requirements that are deemed necessary for safety reasons. The technical specifications provided in this catalog cancel out and replace those already present in the previous general and product catalogs. The updates and product data sheets are available in PDF format on our website.

©All rights reserved. VERSION 10.28.26